




Time battery 6050F

- Water flow time adjustment
- Tilt-adjustable spout.
- Water pressure reduction
- Exceptional durability and reliability
- The product is entirely made in the European Union
- Simple operation
- Easy assembly

| | |
|-------------------------|---------------------------------|
| Option | For cold or mixed water |
| Connector | 1/2" |
| Structure | Brass, aluminum and plastic ABS |
| Water time flow | 25 seconds |
| Start | By means of the button |
| Recommended pressure | 2-4 [bar] |
| Water temperature | 5-65 °C |
| Water pressure reductor | up to 8l/min |

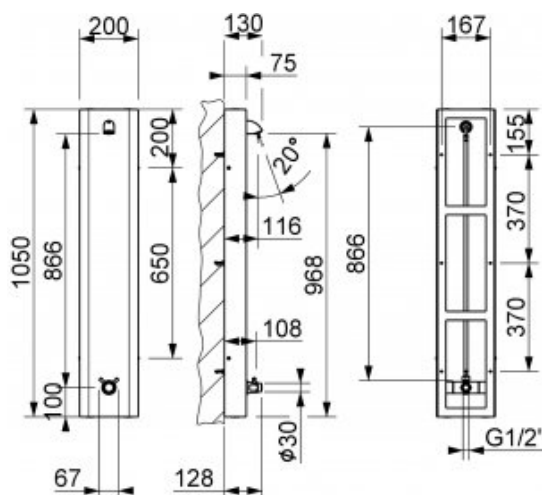

Column shower set made of AISI 316 stainless steel for cold and hot water. The 9050F shower panel has two G1/2 connections, with a standard water flow time of approximately 25 seconds \pm 1 second. The faucet head is made of brass, while the rest of the panel is stainless steel.