




## Time battery 9004E

- The body is made of chrome-plated brass
- Tilt-adjustable spout.
- Inlet pipe with wall mounting
- High resistance to vandalism due to the highest quality materials
- Exceptional durability and reliability
- The product is entirely made in the European Union
- Simple operation
- Easy assembly

Option	For mixed water
Connector	1/2 "
Design	Chrome-plated brass
Water time flow	Adjustable from 15-25 seconds
Start	By means of the button
Water pressure reductor	up to 6l / min.
Water temperature	5-65°C
Water pressure	Min 0,5 bar - Max 6 bar (Recommended 2-4 bar)
Contains	Battery, mounting kit

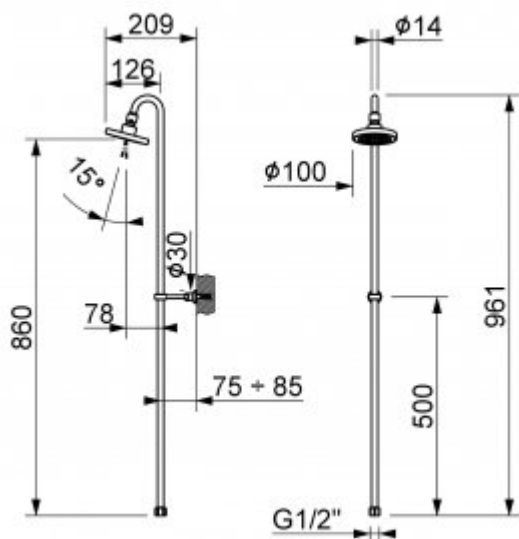

Wall-mounted shower time tap with an elongated spout for one water. The built-in spout is movable. The faucet body is made of chrome-plated brass. It has one G 1/2 connection for cold or pre-mixed water. A single water flow in the 9004E battery takes about 15 - 25 seconds. The amount of water consumed at the outlet is approx. 6 l / m, at a water connection pressure of 3 bar. The connection pressure may be 0.5 - 6 bar, however, the recommended connection pressure should be 2-4 bar. A factory mounting kit is included with each 9004E Series Pillar Battery. Moreover, the whole thing is certified by the Polish Institute of Hygiene, CE Declaration of Conformity and the National Declaration of Performance.