


Electronic photocell battery 2535B



- Infrared sensor with activation on presence detection
- Vandal proof stop after 1 min of continuous flow
- Automatic anti-legionella water flow every 24h after last use
- Long-life 6V integrated lithium battery (220,000 cycles)
- Solenoid valve 6V integrated
- Aerator with 6 l/min. flow limiter
- Spout with 150 mm
- Durability and reliability
- Made in EU
- Easy to use
- Easy to montage

Power	6V battery
Connector	1/2"
Temperature	5-70°C
Design	Vandalproof, brass covered with chrome
Water time flow	6 l/min
Start	Photocell
Operating pressure	Min - 1 - max - 8 bar
Spout	With vandal-resistant aerator

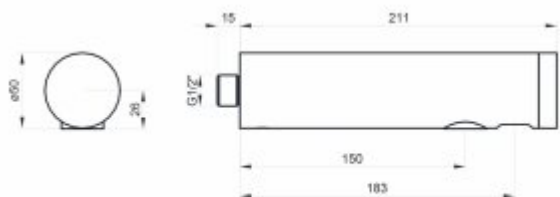

Sink tap with one 1/2 connected for winter or mixed water, made of Moscow, steel chrome. Presentation - presentation of the product taking place in the system in the right place where it can be sold.

Such a system is an economical solution that reduces the cost of use. In the case of the discussed discussion, wall-mounted battery installation in a 6V lithium battery (CRP2). In product 2535B, you can find vandal-resistant water tools, bringing the automatic water mechanism on the other side of the investment completion. Successful passages every 24 hours, preventing the multiplication of microorganisms, including legionella bacteria.