MAKOINSTAL
Infrastruktura sanitarna

# Eyelet

- Eye wash for emergency situations
- One head is protected by dust caps and dirt.
- 1.5 m flexible hose.
- Operated with a lever.

| | |
|---|---|
| Connection | 3/8 " |
| Minimum water pressure | 2 bars |
| Design | Epoxy varnish finish |
| Water flow time | 6 l / min |

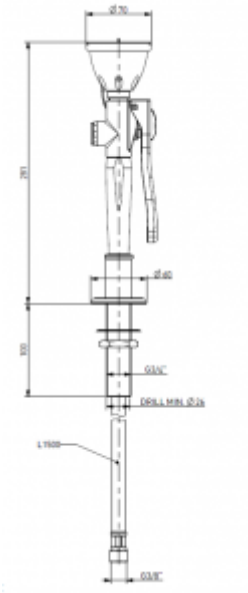

Single eyelet, simple, attached to the top.

Makoinstal S.C.
ul. Ostrobramska 67, 04-175 Warszawat
+48 22 499 59 50, +48 22 499 59 51
makoinstal@makoinstal.pl