




Handrail for the left-angled left 50 / 70cm PSP 133L

- Two options available: glossy (PSP 133L) or mat (PSM 133L)
- Smooth edges prevent it from catching, preventing injury
- Lifting capacity 180 kg
- Made of AISI 304 stainless steel, number on the page, rust and some acids
- Can be mounted in overlapping moisture
- Mounting kit included easy inside
- Certificate of the Polish Institute of Hygiene
- CE declaration of conformity
- National Declaration of Performance

Material	AISI 304 stainless steel
finish	Gloss
Handrail type	Left-angled
Handrail length	500x700 mm
Tube diameter	Ø 32 mm
The wall thickness :	1,5 mm
Maximum capacity	180 kg
Hole diameter	Ø 8 mm
Number of fixing holes:	9
Includes	6x65 mm screws, 8x65 mm plugs

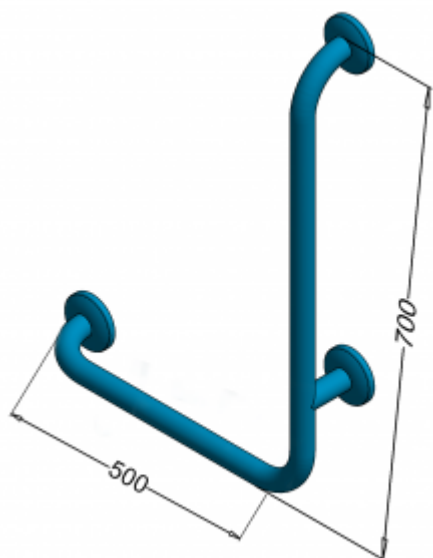

Left angular handrail for the disabled, most often used in the washbasin, shower, and toilet area. The presented handrail is made of AISI 304 stainless steel. The mentioned AISI 304 steel is highly resistant to moisture, corrosion, and rust. This means that the handrails of the 133L series can be installed in atypical rooms, such as a sauna.

The angular handrail offered is available in two finishes:

- glossy (PSP 133L)
- in the mat (PSM 133L)

The total dimension of the handrail 133L is 500x700 mm. The pipe used for production has a diameter of 32 mm, and its wall thickness is 1.5 mm. The total load capacity of the railing is 180 kg. Moreover, the angular handle type 133L is equipped with masking rosettes with a snap-in system, which allows the installation of a masking rosette without the use of mounting glue. The distance of the handrail from the wall to the center of the tube is 90 mm.