




## Platform

- They are characterized by solid construction and easy assembly and disassembly. The valve is easily removable which facilitates possible repair work. The shower head generates a spiral stream with a diameter of 2 m
- G1, G3 / 4, G1 / 2 threads for connecting to a standard drinking water network.
- Drain: G1.
- Minimum required water pressure: 2 bar.
- Water flow: 60 l / min for a large shower head, 12 l / min for a version with a double aerator 6 l / min for a single aerator.
- The hoses are made of galvanized steel.
- The valve is coated with an anti-corrosive epoxy layer.

Connection	Thread G1, G3 / 4, G1 / 2
Minimum water pressure	2 bars
Design	Epoxy varnish finish, galvanized steel
Water flow time	60 l/min

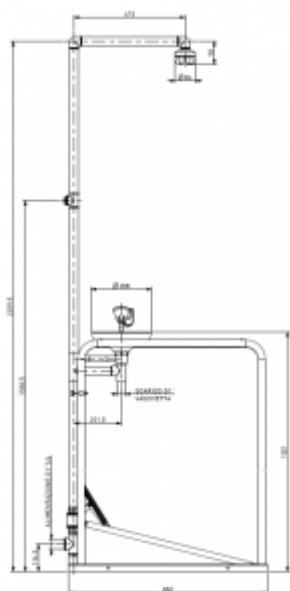

Rescue platform with integrated safety spray and eyelet. The water is activated immediately after entering the platform.