




## Thermostatic mixer 8135MIXT

- Thermostatic mixer
- Exceptional durability and reliability
- The product is made in the European Union
- Simple operation
- Easy to assemble
- Vandal-resistant finish
- Water pressure adjustment

Option	With mixer
Connector	2 x 1/2
Mixer	Thermostatic
Design	Vandal-resistant - chrome-plated brass
Water time flow	Adjustable from 15 seconds
Start	By means of the button
Water pressure reductor	up to 6l/min.
Spout	Equipped with an aerator

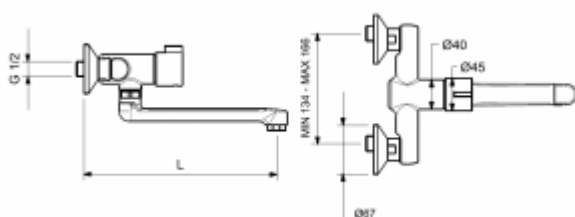

Wall-mounted tap with built-in thermostatic mixer TMV3 with limited water temperature to 41°C. The faucet body is made of corrosion-resistant chrome-plated brass. In the central part of the body there is a button that activates the water flow, a water temperature regulator and a swivel spout. Spout has a built-in aerator.

A single water flow, with the standard battery setting, is about 15 seconds - at an operating pressure of 3 bar. The water flow is 6 l / m - at an operating pressure of 3 bar. The connection pressure may be in the range of 1 bar - 5 bar, however the recommended pressure is 2-4 bar.