


## Time battery 5000TP

- Thermostatic mixer to prevent burns.
- The body is made of chrome-plated brass
- Water flow time adjustment
- Water pressure reduction
- High resistance to vandalism due to the highest quality materials
- Exceptional durability and reliability
- The product is entirely made in the European Union
- Simple operation
- Easy assembly
- Certified by the Polish Institute of Hygiene
- CE Declaration of Conformity
- The National Declaration of Performance

Option	With mixer
Connector	2 x G1/2
Mixer	Thermostatic
Design	Vandal-resistant - chrome plated brass
Water time flow	Adjustable from 0-40 secpnds ± 10 seconds
Start	By means of the button
Water pressure reductor	up to 6l / min.
Water temperature	5-65°C
Water pressure	Min 0,5 bar - Max 6 bar (Recommended 2-4 bar)
Spout	Lack
Contains	Battery, mounting kit, battery check valves

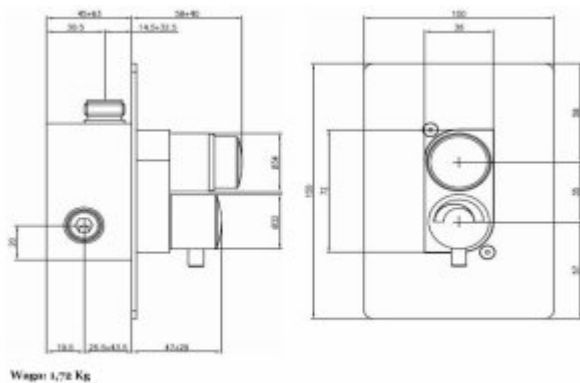

Shower timer with thermostatic mixer. Temperature regulation by means of a knob located below the start button. Possibility of safe water temperature regulation thanks to anti-scalding protection preventing exceeding the permissible temperature of 38°C. A single water flow can last 15-25 seconds (water pressure 3 bar), with water consumption of approx. 6 l / m. The water connection pressure can be 0.5 - 6 bar, however, the recommended connection pressure should be 2-4 bar. The 5000TP tap is certified by the Polish Institute of Hygiene, CE Declaration of Conformity, and the National Declaration of Performance.