




## Time battery 6050F

- Water flow time adjustment
- Tilt-adjustable spout.
- Water pressure reduction
- Exceptional durability and reliability
- The product is entirely made in the European Union
- Simple operation
- Easy assembly

Option	For cold or mixed water
Connector	1/2"
Structure	Brass, aluminum and plastic ABS
Water time flow	25 seconds
Start	By means of the button
Recommended pressure	2-4 [bar]
Water temperature	5-65 °C
Water pressure reductor	up to 8l/min

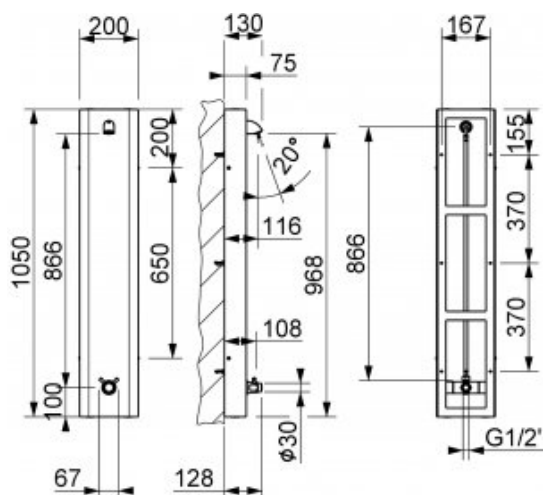

Column shower set made of AISI 316 stainless steel for cold and hot water. The 9050F shower panel has two G1/2 connections, with a standard water flow time of approximately 25 seconds  $\pm$  1 second. The faucet head is made of brass, while the rest of the panel is stainless steel.