




Time battery 9003FL

- The body is made of chrome-plated brass
- Water flow time adjustment by means of the regulating hole
- Water flow reduction by means of a water flow reducer and a regulating cup
- High resistance to vandalism
- Exceptional durability and reliability
- The product is entirely made in the European Union
- Simple operation
- Easy to assemble
- PZH certificate, CE declaration

| | |
|-------------------------|---|
| Option | For mixed water |
| Connector | G1/2 |
| Design | Chrome-plated brass |
| Water time flow | Adjustable from 10 seconds \pm 3 second |
| Start | By lever |
| Water pressure reductor | up to 6l / min |
| Water temperature | 5-65°C |
| Water pressure | Min 0,5 bar - Max 6 bar (Recommended 2-4 bar) |
| Contains | Battery, mounting kit for the washbasin |

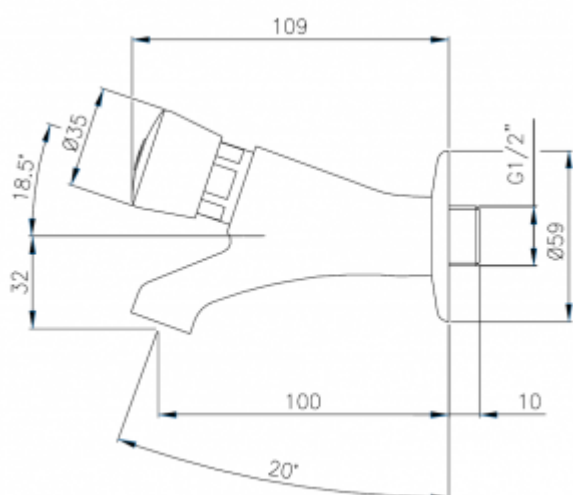

Wall-mounted washbasin timer with one G1/2 connection for cold or pre-mixed water. The body of the faucet is made of solid brass covered with a layer of chrome. The built-in spout is equipped with a standard strainer to regulate the water stream.

Standard water flow time is approx. 10 seconds \pm 3 seconds (at 3 bar water pressure). The amount of water consumed by the flow of water is up to 6 l / m. The minimum connection pressure is 0.5 bar, the maximum is 6 bar, the recommended connection pressure should be 2-4 bar

What's more, the 9003FL basin mixer has elements that regulate the water flow, such as:

- a cup regulating the flow of water, located in the head;
- water flow regulator - included with the faucet, requires manual installation in the connection area;
- the water flow regulating hole in the head. The flow time can be changed with the enclosed allen key.

The option to adjust the water flow time is not available. Importantly, each 9003FL battery comes with a mounting kit and the whole is certified by the Polish Institute of Hygiene, CE Declaration of Conformity and the National Declaration of Performance.