




Wall Mounted Electronic Photocell 2519B

- Suitable for accessible walls
- Infrared sensor with activation on presence detection
- Vandal-proof stop after 1 min of continuous flow
- Automatic anti-legionella water flow every 24h after last use
- Aerator with 2 l/min flow limiter

Power	Battery 4xAA
Connector	G1/2
Temperature	5-70°C
Design	Brass covered with chrome
Water time flow	2 l/min
Start	Infrared sensor with presence detection function
Operating pressure	Min - 0,5,max - 6 bar
Spout	With vandal-resistant aerator

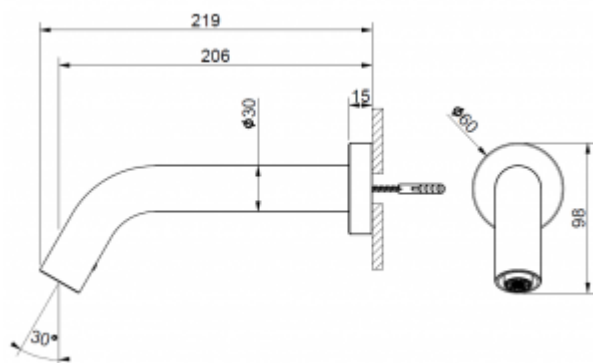

The touchless washbasin faucet 2519B is designed for wall mounting, including installation on plasterboard surfaces. Its construction allows for quick and hassle-free installation, while the built-in infrared sensor automatically activates the water flow when motion is detected within its range.

The faucet is equipped with a standard anti-scale filter and a mechanism made of anti-deposit components, complemented by an anti-limescale system that protects the interior from scale buildup. An additional feature is the possibility of thermal Anti-Legionella cleaning, which enhances hygiene.

The solid body made of brass, coated with a layer of chrome, is highly resistant to corrosion and mechanical damage. The vandal-resistant design, combined with economical water consumption of 2 l/min, makes the 2519B faucet an excellent choice for areas with high usage intensity.

Each wall-mounted faucet from the 2519B series holds certification from the Polish Institute of Hygiene, a CE Declaration of Conformity, and a National Declaration of Performance.