



KATALOG

makoinstal



TABLE OF

BATHROOM SANITARYWARE

Washbasin sanitaryware	3
Shower sanitaryware	6
Urinal sanitaryware	9
Toilet sanitaryware	9
Children sanitaryware	10
Mixers	11
Sanitaryware for disabled	12
Sanitaryware for water dispensers	12
Specialistic sanitaryware	13
Medical sanitaryware	14
Touchless sanitaryware	15
Power suppliers	19

RAILS FOR DISABLED

Stainless steel rails MakoLux	20
Steel rails, white EkoMed	25
Stainless steel rails EkoLux	29

EMERGENCY

Eye washers	30
Emergency showers	31

DRYERS

Hand dryers	32
Pool dryers	34
Hotel dryers	35

BATHROOM ACCESSORIES







Bathroom accessories	37
Waste bins	42
Other accessories	45
Stainless steel	46
Hotel accessories - Virginia series	48
Hotel accessories - Nord series	49







WASHBASIN SANITARYCARE



		code	description	
Washbasin		8401	<p>Timed flow, self-closing</p> <p>Installation 1/2" connector for cold and pre-mixed water</p> <p>Parameters Side self regulation of temperature Water time flow for aprox. 15 sec. with pressure of 3 bars Water pressure reductor (6 l/min) Anti-vandal construction</p> <p>Options 8401/M- Version for pre-mixed water with under-washbasin mixer 9020</p>	
		8407	<p>Timed flow mixer, self-closing</p> <p>Installation two 1/2" connectors for cold and hot water</p> <p>Parameters Side self regulation of temperature Water time flow for aprox. 15 sec. with pressure of 3 bars Water pressure reductor (6 l/min) Anti-vandal construction</p>	
		9077 9070 9070/M	<p>Timed flow mixer, self-closing</p> <p>Installation two 1/2" connectors for cold and hot water</p> <p>Parameters Side self regulation of temperature Regulation of water pressure and water flow Water pressure reductor (6 l/min) Anti-vandal construction</p> <p>Options 9070 - Version for pre-mixed water 9070/M - Version for pre-mixed water with under-washbasin mixer 9020</p>	
		9370	<p>Timed flow mixer TEMPOR, self-closing</p> <p>Installation two 1/2" connectors for cold and hot water</p> <p>Parameters Regulated water time flow up to max. ~12 sec. Water temperature regulation in a button. Solid brass body Anti-vandal construction</p>	
		9302 9302/M	<p>Timed flow TEMPOR for pre-mixed water, self-closing</p> <p>Installation 1/2" connector for cold and pre-mixed water</p> <p>Parameters Regulated water time flow up to max. ~12 sec. Solid brass body Anti-vandal construction</p> <p>Options 9302/M-Version for pre-mixed water with under-washbasin mixer 9020</p>	
		9301 9301/M	<p>Timed flow TEMPOR for pre-mixed water, self-closing</p> <p>Installation 1/2" connector for cold and hot water</p> <p>Parameters Regulated water time flow up to max. ~12 sec. Solid brass body Anti-vandal construction</p> <p>Options 9301/M- Version for pre-mixed water with under-washbasin mixer 9020</p>	



		code	description	
Washbasin		9007	<p>Timed mixer, self-closing</p> <p>Installation Two 1/2" connectors for cold and pre-mixed water</p> <p>Parameters Water pressure regulation Regulated water time flow Water pressure reductor (6 l/min) Solid brass body Anti-vandal construction Anti-block system</p>	
		9001A 9001A/M 9001 9001/M	<p>Timed flow for pre-mixed water, self-closing</p> <p>Installation Two 1/2" connectors for cold and pre-mixed water</p> <p>Parameters Water pressure and time flow regulation Water pressure reductor (6 l/min) aerator spout Solid brass body Anti-vandal construction Anti-block system</p> <p>Options 9001 - no aerator version 9001A/M - version with aerator and under-basin mixer 9020 9001/M - version with under-basin mixer 9020</p>	
		9090 9090/M	<p>Timed flow for pre-mixed water, self-closing</p> <p>Installation Two 1/2" connectors for cold and pre-mixed water</p> <p>Parameters Water pressure and time flow regulation Water pressure reductor (6 l/min) Solid brass body Anti-vandal construction Anti-block system</p> <p>Options 9090/M: version with under-basin mixer 9020</p>	
		9002 9002/M	<p>Timed flow for pre-mixed water, self-closing</p> <p>Installation Two 1/2" connectors for cold and pre-mixed water</p> <p>Parameters Water time flow ~12 sek. Water pressure regulation Water pressure reductor (6 l/min) Solid brass body Anti-vandal construction Anti-block system</p> <p>Options 9002/M: Z mieszaczem podumywalkowym 9020</p>	
		9813	<p>Timed flow with anti-burn blockade</p> <p>Installation Two 1/2" connectors for cold and hot water</p> <p>Parameters Water pressure and time flow regulation Water pressure reductor (6 l/min) Mixer with anti-burn blockade Solid brass body Anti-vandal construction Anti-block system</p>	
		9087 9080 9080/M	<p>Timed flow with mixer, self-closing</p> <p>Installation Two 1/2" connectors for cold and hot water</p> <p>Parameters Water pressure and time flow regulation Water pressure reductor (6 l/min) Anti-vandal construction Anti-block system</p> <p>Options 9080 - Version for pre-mixed water 9080/M - Version for pre-mixed water with under-basin mixer 9020</p>	

WALL-MOUNTED WASHBASIN SANITARYWARE

		code	description	
Wall-mounted		9003S	<p>Wall-mounted timed flow, self-closing</p> <p>Installation 1/2" connector for cold and pre-mixed water</p> <p>Parameters Regulation of water pressure and water flow Water pressure redeuctor (6 l/min) Solid brass body Anti-vandal construction Anti-Block system</p>	
		9043 9003P	<p>Wall-mounted timed flow, self-closing</p> <p>Installation 1/2" conector for cold and hot water</p> <p>Parameters Regulation of water pressure and water flow Water pressure redeuctor (6 l/min) Regulated distance from the wall Solid brass body Anti-vandal construction Anti-Block system</p>	
		9003F	<p>Wall-mounted timed flow, self-closing</p> <p>Installation 1/2" connector for cold and pre-mixed water</p> <p>Parameters Regulation of water pressure and water flow Water pressure redeuctor (6 l/min) Solid brass body Anti-vandal construction Anti-Block system</p>	
		9073	<p>Wall-mounted timed flow, self-closing</p> <p>Installation 1/2" connector for cold and pre-mixed water</p> <p>Parameters Regulation of water pressure Regulated water time flow up to max. ~12 sec. Water pressure redeuctor (6 l/min) Solid brass body Anti-vandal construction Anti-Block system</p>	

WALL-MOUNTED TAP SANITARYWARE









		code	description	
Wall-mounted	NEW IN 	8083 MIX 8093 MIX	<p>Wall-mounted timed flow tap with thermostatic mixer, surface-mounted, self-closing</p> <p>Installation Two 1/2" conectors for cold and hot water</p> <p>Parameters Water time flow up to max. ~12 sec. Two lenghts of swivel spout: 9083 MIX - 200 mm 9093 MIX - 140 mm Check valves and filters Water pressure redeuctor (6 l/min) Anti-Block system</p>	
		9092	<p>Wall-mounted timed flow tap with mixer, surface-mounted, self-closing</p> <p>Installation Two 1/2" conectors for cold and hot water</p> <p>Parameters Regulation of water pressure and water flow Swivel spout Water pressure redeuctor (6 l/min) Check valves Mechanism which cuts of water of for pommel conservation Anti-Block system</p>	

SHOWER SANITARY FITTINGS



Concealed mixers

	code	description
	9004A	Surface-mounted timed flow tap, self-closing, Installation 1/2" connector for cold and pre-mixed water Parameters Water pressure and time flow regulation Water pressure reductor (6 l/min) Solid brass body Anti-vandal construction Anti-block system
	9005	Recessed timed flow tap, self-closing Installation 1/2" connector for cold and pre-mixed water Parameters Water pressure and time flow regulation Water pressure reductor (6 l/min) Solid brass body Anti-vandal construction Anti-block system 9905 - Mountig box
 NEW IN	9010MIX 9010MIX BOX 9010MIXT 9010MIXT BOX 9010C	Time flow mixer: recessed, self-closing Installation two 3/8" connectors for cold and hot water Parameters Water time flow~15 sek. Water pressure regulation Water pressure reductor (8 l/min) Check valves Anti-vandal construction Anti-block system 9010MIXT - version with thermostatic mixer 9010MIX BOX/9010MIXT BOX - Mountig box version
	9005MIX plus	Time flow mixer: recessed, self-closing Installation two 1/2" connectors for cold and hot water Parameters Water pressure and time flow regulation Water pressure reductor (6 l/min) Solid brass body Anti-vandal construction Anti-block system 9985 - Mountig box
	9985 9905	Mountig box Parameters Anti-vandal construction made of stainless steel AISI304. Box contains box, grill and mounting set, grill and mountig set
 NEW IN	9905MIXC	Concealed timed mixer, self-closing Installation two 1/2" connectors for cold and hot water Parameters Water pressure and time flow regulation Water pressure reductor (6 l/min) Anti-vandal construction Anti-block system Mounting box

SHOWER SANITARYWARE






		code	description	
shower panels		9290	<p>Timed shower panel "SLIM" for pre-mixed water</p> <p>Installation 1/2"connector for cold and pre-mixed water placed at the top of the panel</p> <p>Parameters Water time flow~25 sec. Made of: aluminium + ABS material Water pressure reductor (8l/min.) Surface-mounted</p>	
		<p>8132MIX</p> <p>8132MIX/1</p> <p>8132MXT/1</p>	<p>Shower timed mixer, self-closing</p> <p>Installation Two 1/2" conectors for cold and hot water</p> <p>Parameters Self water temperature regulation Water time flow: 15 sec. Water pressure reductor (8 l/min) Check valves Anti-vandal construction</p> <p>Options 8132MIX/1 - Mixer without spout 8132MXT/1 - Termostatic mixer</p>	
		9006MIX	<p>Timed mixer, surface-mounted, self-closing</p> <p>Installation Two 1/2" conectors for cold and hot water</p> <p>Parameters Self water temperature regulation Regulation of water pressure and water time flow Spout with joint - movable Check valves Mechanism which cuts of water of for pommel conservation Anti-vandal construction</p> <p>Options 9006MIX/1 - Mixer without spout 9006MIX plus - 30 cm longer tube</p>	
		9004D	<p>Shower set, surface mounted, self-closing</p> <p>Installation 1/2"connector for cold and pre-mixed water</p> <p>Parameters Regulation of water pressure and water time flow Spout with joint - movable Anti-vandal construction</p>	
		9004F	<p>Shower set, surface mounted, self-closing</p> <p>Installation 1/2"connector for cold and pre-mixed water</p> <p>Parameters Water time flow: 12 sec, Wall mounted, solid spout Anti-vandal construction</p>	




	code	description	
	9012	Shower head	<p>Installation 1/2" connector</p> <p>Parameters Water pressure reductor (8 l/min) Anti-vandal construction</p>
	9014	Swivel shower head	<p>Installation 1/2" connector</p> <p>Parameters Water pressure reductor (8 l/min) Anti-vandal construction</p>
	9017	Shower head	<p>Installation 1/2" connector</p> <p>Parameters Water pressure reductor (8 l/min) Anti-vandal construction Water flow control with the use of inter-changeable nozzles</p>
	9311	Shower head	<p>Installation 1/2" connector</p> <p>Parameters Concealed or surface-mounted Water pressure reductor (8 l/min) Mounting with screws and plugs Anti-vandal construction</p>
	9018	Shower head	<p>Installation 1/2" connector</p> <p>Parameters Concealed or surface-mounted Water pressure reductor (8 l/min) Anti-vandal construction Antiscaling</p>
	9013	Swivel shower head	<p>Installation 1/2" connector</p> <p>Parameters Water pressure reductor (8 l/min) Anti-vandal construction Antiscaling</p>
	9019	Swivel shower head	<p>Installation 1/2" connector</p> <p>Parameters Water pressure reductor (8 l/min) Anti-vandal construction Antiscaling</p> <p>Options 9019/1 - Spout for head</p>







URINAL SANITARYWARE



		code	description	
Urinal sanitaryware		9004 9004P	<p>Urinal set</p> <p>Installation 1/2"connector</p> <p>Parameters Water time flow ~6 sek. Regulation of water pressure Water pressure reductor(6 l/min) Height regulation Solid brass body Anti-vandal construction</p> <p>9004P - Urinal tap</p>	
		9340	<p>Urinal set TEMPOR</p> <p>Installation 1/2"connector</p> <p>Parameters Water time flow regulation Water pressure reductor(8 l/min) Height regulation Solid brass body Anti-vandal construction</p>	
		9005P	<p>Urinal tap, concealed, self-closing</p> <p>Installation 1/2"connector</p> <p>Parameters Water time flow ~6 sec. Regulation of water pressure Water pressure reductor(6 l/min) Solid brass body Anti-vandal construction</p> <p>9905 - Mountig box</p>	

WC SANITARYWARE





		code	description	
WC valves		9454	<p>Floor flow valve for WC</p> <p>Installation 1"connector</p> <p>Parameters Water time flow~5 sec. Foot operated Anti-vandal construction</p>	
		9455	<p>Recessed flow valve for WC</p> <p>Installation 3/4" or 1"connector</p> <p>Parameters Water time flow~5 sec. Anti-vandal construction</p> <p>9955 - Mountig box</p>	
		9457 9458	<p>Timed flow valve for VC</p> <p>Installation 3/4" or 1"connector</p> <p>Parameters Water time flow~5 sec. Anti-vandal construction</p> <p>9458 - Supplying tube</p>	

	code	description
	B210	<p>Mixed water tap</p> <p>installation 1/2" cold or mixed water connection</p> <p>Parameters Water pressure reductor (6 l/min) Ceramic head Vandal proof design Equipped with ECO-STOP function</p>
	B220	<p>Wall mounted mixed water tap</p> <p>installation 1/2" cold or mixed water connection</p> <p>Parameters Water pressure reductor (6 l/min) Ceramic head Vandal proof design Equipped with ECO-STOP function</p>
	B221	<p>Wall mounted tap with a mixing valve</p> <p>installation two 1/2' connectors for cold and hot water</p> <p>Parameters Water pressure reductor (6 l/min) Ceramic head Vandal proof design Equipped with ECO-STOP function</p>
	B250	<p>Electronic mixed water tap</p> <p>installation 1/2" cold or mixed water connection</p> <p>Parameters 6V battery powered Water pressure reductor (6 l/min) Vandal proof design</p>
	B400 B400W	<p>Tap with ceramic mixer</p> <p>installation two 1/2' connectors for cold and hot water</p> <p>Parameters Water pressure reductor (6 l/min) Ceramic head Vandal proof design Avable colours: B400 - body colour B400W - wood imitation</p>
	B402 B402W	<p>Timed flow, self-closing</p> <p>installation two elastic 1/2' connectors for cold and hot water</p> <p>Parameters Side water temperature regulation Water pressure and time flow regulation Vandal proof design Avable colours: B402 - body colour B402W - wood imitation</p>

	code	description		
	9020	Mechanical mixer Installation Two 1/2" connectors for cold and hot water Parameters Built in non-returned valves Max. 1 flow connected		
	9027-15 9027-22 9027-34	Thermostatic mixer Parameters Regulation of the temperature 30-48 °C Max. temperature of connection is 90 °C Max. working pressure 10 bars		
Efficiency with 1 bar pressure				
	Code	Connector	m ³ /h Kind of connector	
	9027-15	Ø 15	2,6 Compression ends (check valves + filters)	
	9027-22	Ø 22	2,6 Compression ends (check valves + filters)	
	9027-34	3/4"	2,75 Screw (check valves, no filters)	
Given informations might be different in various instalation types.				
	9029-12	Thermostatic mixer Parameters Regulation of the temperature 30-48 °C Max. temperature of connection is 90 °C Max. working pressure 10 bars		
	9029-34			
	9029-1			
	Efficiency with 1 bar pressure			
		Code	Connector	m ³ /h Kind of connector
	9029-12	1/2"	1,3 Screw (no check valves, no filters)	
	9029-34	3/4"	1,8 Screw (no check valves, no filters)	
	9029-1	1"	2,75 Screw (no check valves, no filters)	
Given informations might be different in various instalation types.				
	9026-12	Thermostatic mixer Parameters Regulation of the temperature 30-65 °C Max. temperature of connection is 90 °C Max. working pressure 10 bars		
	9026-34			
	9026-1			
	Efficiency with 1 bar pressure			
		Code	Connector	m ³ /h Kind of connector
	9026-12	1/2"	1,5 Screw (check valves+filters)	
	9026-34	3/4"	1,7 Screw (check valves+filters)	
	9026-1	1"	3,0 Screw (check valves+filters)	
Given informations might be different in various instalation types.				
	CAL6000-34	Electronical mixing valve with programmable thermal disinfection with control disinfection Parameters Power: 230 V – 50/60 Hz – (6,5+6) VA Temperature regulation 20-85°C Disinfection temperature: 40-85°C Max. pressure 10 bar Max. in temperature: 100°C Protection level: IP65 (servomotor)		
	CAL6000-1			
	CAL6000-114			
	CAL6000-112			
	CAL6000-2			
	Efficiency with 1 bar pressure			
		code	connector	m ³ /h
		CAL6000-34	3/4"	8,4
		CAL6000-1	1"	10,6
		CAL6000-114	1" 1/4	21,2
	CAL6000-112	1" 1/2	32,5	
	CAL6000-2	2"	41	
Given informations might be different in various instalation types.				



SANITARYWARE FOR DISABLED



		code	description
For disabled		9001L	<p>Timed flow for disabled</p> <p>Installation 1/2" connector for cold and pre-mixed water</p> <p>Parameters Water time flow ~12 sec. Water pressure reductor (6L/min)</p> <p>Options 9001L/M - with under-basin mixer 9020</p>
		9007L	<p>Timed mixer for disabled</p> <p>Installation two elastic 1/2" connectors for cold and hot water</p> <p>Parameters Side water temperature regulation Water time flow ~12 sec. Anti-vandal construction</p>
		9003L	<p>Bateria czasowa ścienna dla osób niepełnosprawnych</p> <p>Installation 1/2" connector for cold and pre-mixed water</p> <p>Parameters Water time flow ~12 sec. Water pressure reductor (6L/min) Anti-vandal construction</p>
	NEW IN 	9092L	<p>Bateria czasowa z mieszaczem, ścienna dla osób niepełnosprawnych</p> <p>Installation two 1/2" connectors for cold and hot water</p> <p>Parameters Water time flow ~12 sec. Water pressure reductor (6L/min) Anti-vandal construction</p>

WATER DISPENSERS SANITARYWARE










		code	description
Water dispensers for sanitaryware	NOWOŚĆ 	9053	<p>Water dispenser valve</p> <p>Installation 1/2" connector</p> <p>Parameters Water flow regulation Solid brass body Anti-vandal construction</p>
	NOWOŚĆ 	9054	<p>Water dispenser valve with spout</p> <p>Installation 1/2" connector</p> <p>Parameters Water flow regulation High spout Solid brass body Anti-vandal construction</p>

SPECIALISTIC SANITARYWARE









Specialistic

	code	description
	9030	<p>Wall-mounted timed tap, self-closing</p> <p>Installation 1/2"connector for cold and pre-mixed water</p> <p>Parameters Rotatable spout Water time flow~12 sek. Water pressure reductor (6L/min) Anti-vandal construction</p>
	9022	<p>Timed mixer, wall-mounted, self-closing, thermostatic</p> <p>Installation Two 1/2" conectors for cold and pre-mixed water</p> <p>Parameters Self water temperature regulation Thermostatic mixer with anti-burn blockade Water time flow15 sec. Possibility of connection tube with handshower</p>
	9088	<p>Timed mixer, surface mounted with rotatable spout</p> <p>Installation Two 1/2" conectors for cold and hot water</p> <p>Parameters Rotatable spout Regulation of water pressure and time flow Water pressure reductor (6L/min) Check valves</p>
	9100	<p>Lever-operated timed flow valve</p> <p>Installation 1/2"connector for cold and pre-mixed water</p> <p>Parameters Parameters lever-operated, knee-operated, wall-mounted or floor-mounted installation Water time flow for approximately 15 seconds with a pressure of 3 bars Anti-vandal construction Water pressure reductor (6L/min)</p>
	9091	<p>Timed flow pillar tap, self-closing</p> <p>Installation 1/2"connector for cold and pre-mixed water</p> <p>Parameters Swivel spout Water time flow regulation Anti-vandal construction Water pressure reductor (6L/min)</p>
	9035	<p>Timed flow, surface mounted for pre-mixed water with chain</p> <p>Installation 1/2"connector for cold and pre-mixed water</p> <p>Parameters Water time flow up to~30 sec. Water pressure regulation Water pressure reductor(6L/min) Operated by chain pulling Anti-vandal construction</p>
	9009	<p>Floor timed vakve</p> <p>Installation 1/2"connector for cold and pre-mixed water</p> <p>Parameters Water time flow~3 sec. Water pressure reductor(6L/min) Anti-vandal construction</p>

MEDICAL SANITARYWARE










Medical sanitaryware

	code	description
	2400	<p>medical tap, wall-mounted</p> <p>Installation two 1/2' connectors for cold and hot water</p> <p>Parameters swivel spout Wall-mounted Ceramic mixer elbow-operated lever</p>
	2450	<p>medical tap</p> <p>Installation two 1/2' connectors for cold and hot water</p> <p>Parameters swivel spout Ceramic mixer elbow-operated lever</p>
	2475	<p>medical tap</p> <p>Installation two 1/2' connectors for cold and hot water</p> <p>Parameters Ceramic mixer elbow-operated lever</p>
	9057	<p>medical tap, foot-operated</p> <p>Installation 1/2" connector for cold and pre-mixed water</p> <p>Parameters Floor or wall mounted Water time flow~3 sec. Anti-vandal construction</p>
	9058	<p>foot-operated tap with mixer</p> <p>Installation two elastic 1/2' connectors for cold and hot water</p> <p>Parameters Regulacja temperatury poprzez nacisk pedału. Floor or wall mounted Check valves Anti-vandal construction</p>
	9059	<p>Double pedal foot operated</p> <p>Installation two elastic 1/2' connectors for cold and hot water</p> <p>Parameters Floor or wall mounted Water time flow~3 sec. Check valves Anti-vandal construction</p>

TOUCHLESS SANITARYWARE



		code	description	
Basin Type		3113	<p>Photocell electronic tap with a mixing valve</p> <p>Installation 3/8"connector for cold and hot water</p> <p>Parameters 6V powered (suggested power supply: ZAS230/6 DSC) Anti-vandal construction</p> <p>Options 3113B - 6V Battery powered version</p>	
		3114	<p>Photocell electronic tap with a mixing valve</p> <p>Installation 3/8"connector for cold and hot water</p> <p>Parameters 6V powered (suggested power supply: ZAS230/6 DSC) Anti-vandal construction Rotary spout</p> <p>Options 3114B - 6V Battery powered version</p>	
		3101	<p>Photocell electronic tap with a mixing valve</p> <p>Installation 3/8"connector for cold and hot water</p> <p>Parameters 6V powered (suggested power supply: ZAS230/6 DSC) Anti-vandal construction</p> <p>Options 3101B - 6V Battery powered version</p>	
		3102	<p>Photocell electronic tap with a mixing valve</p> <p>Installation 3/8"connector for cold and hot water</p> <p>Parameters 6V powered (suggested power supply: ZAS230/6 DSC) Made of stainless steel</p> <p>Options 3102B - 6V Battery powered version</p>	
		3103	<p>Photocell electronic tap</p> <p>Installation 3/8"connector for pre-mixed water</p> <p>Parameters 12V powered Chrome finish</p> <p>Options 3103B - 6V Battery powered version 3103/M - under basin mixing valve version 12V powered 3103B/M - under basin mixing valve version 6V Battery powered version</p>	
		2511R	<p>Photocell electronic tap</p> <p>Installation 1/2"connector for pre-mixed water</p> <p>Parameters 12V powered</p> <p>Options 2511B - 6V Battery powered version 2511R/M - under basin mixing valve version 6V powered 2511B/M - under basin mixing valve version 6V Battery powered version</p>	
		2503R	<p>Photocell electronic tap</p> <p>Installation 1/2"connector for pre-mixed water</p> <p>Parameters 12V powered</p> <p>Options 2503B - 6V Battery powered version 2503R/M - under basin mixing valve version 6V powered 2503B/M - under basin mixing valve version 6V Battery powered version</p>	

TOUCHLESS SANITARYWARE



	code	description	
	2512R 2512B	Photocell electronic tap with a mixing valve Installation two elastic 1/2" connectors for cold and hot water Parameters 6V powered (power supply contained) Intelligent sensor adapting to the ambient parameters Anti-vandal construction Options 2512B - 6V battery powered	
	2620	Photocell electronic tap with a mixing valve Installation two elastic 3/8" connectors for cold and hot water Parameters Battery powered (4 x AA 1,5 V) Intelligent sensor adapting to the ambient parameters Anti-vandal construction	
	3109B	Photocell electronic tap with thermostatic regulator Installation two 1/2" connectors Parameters Battery powered 6V Rozstaw przyłączy 150 mm, wylewka L - 160 mm Options 3110B - Spacing of connections 150 mm, spout L - 160 mm	
NOWOŚĆ 	2535B	Photocell electronic tap Installation 1/2" connector for cold and pre-mixed water Parameters Battery powered 6V Aerator with a flow of 6l / min Automatic switch off after 1 minute. continuous use	
	3112	Electronic battery for photocell with mixer, for installation on sinks Installation 1/2" connector for cold and hot water Parameters Power 24V (suggested power supply SLZ 01Y)	
	3201R	Sink with optoelectronic sensor Parameters 24 V powered Made of stainless steel Spout F-185 mm Cover 472 x 413 x 280 mm Options 3201B - 9 V battery powered version 3202R/M - version with mixer 24 V 3202B/M - 9 V battery powered version with mixer 24 V	

TOUCHLESS SERIES








Urinal

	code	description
	3301W	<p>Electronic, urinal, concealed tap</p> <p>Installation Connector 1/2"</p> <p>Parameters 6 V powered (suggested power supply: ZAS230/6 DSC) Durable, glass cover</p> <p>Options With a mounting box</p>
	3302	<p>Electronic, urinal, concealed tap</p> <p>Installation Connector 1/2"</p> <p>Parameters 6 V powered (suggested power supply: ZAS230/6 DSC) Anti-vandal construction Stainless steel housing</p> <p>Options 3302B - 6V Battery powered version With a mounting box</p>
	3303	<p>Electronic, urinal, concealed tap</p> <p>Installation Connector 1/2"</p> <p>Parameters 12 V powered (suggested power supply: TR8) Anti-vandal construction Stainless steel housing</p> <p>Options 3303B - 6V Battery powered version 3304 - Version operating on a set of urinal units</p>
	3305B	<p>Electronic, urinal, exposed tap</p> <p>Installation Connector 1/2"</p> <p>Parameters 6 V battery powered</p> <p>Set includes Mounting pipe for the urinal unit</p>
	3306	<p>Electronic, conductometric urinal tap</p> <p>Installation Connector 1/2"</p> <p>Parameters 6 V powered (suggested power supply: ZAS 230/6 DSC)</p> <p>Options: 3306B - 6V Battery powered version</p>
	3307R	<p>Electronic, urinal, concealed set</p> <p>Installation Connector 1/2"</p> <p>Parameters 6 V powered Anti-vandal construction Stainless steel housing</p> <p>Set includes Self-supporting 3302 steel frame construction Power supply unit or a battery</p> <p>Options: 3307B - 6V Battery powered version</p>

TOUCHLESS SANITARYWARE






Shower




	code	description
	3401B	<p>Shower electronic flow, wall mounted with thermostatic regulation</p> <p>Installation 1/2"connector for cold and hot water</p> <p>Parameters 6V battery powered Connection distance 150 mm</p>
	3402B	<p>Shower electronic flow thermostatic</p> <p>Installation 3/8" connector for cold and hot water</p> <p>Parameters 6V battery powered Made of stainless steel (mat)</p> <p>Contains Solenoid, thermostat, shower spout, ball valves with a dirt filter, connection hoses, battery container</p>
	3406B	<p>Shower electronic flow,</p> <p>Installation 1/2" connector for pre-mixed water</p> <p>Parameters 6V battery powered Made of stainless steel (mat)</p> <p>Contains Solenoid valve, ball valve with dirt filter, connection hose, battery container, shower spout</p>
	2540R	<p>Shower electronic flow, concealed</p> <p>Installation 1/2" connector for pre-mixed water</p> <p>Parameters 6V battery powered Anti-vandal construction Made of stainless steel</p> <p>Contains Mounting frame, mounting box with screws, ball valve</p> <p>Options 2540B - 6V battery powered version</p>
	3408	<p>Shower electronic flow thermostatic, concealed</p> <p>Installation 1/2"connector for cold and hot water</p> <p>Parameters 6V powered (suggested power supply ZAS 230/6 DSC) Anti-vandal construction Made of stainless steel</p> <p>Options 3408B - 6V battery powered version</p>

TOUCHLESS SERIES



		code	description
Toilet frames		3501C	<p>Touchless concealed toilet flush</p> <p>Installation 1" connector</p> <p>Parameters 12V powered (suggested power supply: TR8)</p> <p>Set includes Mounting frame, ball valve , mounting box with screws , connecting cable, grill</p>
		3502SR	<p>Heavy-duty, concealed, touchless toilet system</p> <p>Installation Connector 1/2"</p> <p>Parameters 6V powered</p> <p>Set includes Frame, tile with a touchless flush installed, and a 6V power supply unit</p> <p>Options 3502WR - Version with flushing model ASS 3M</p>
		3504SR	<p>Light- duty, concealed, touchless toilet system</p> <p>Podłączenie Connector 1/2"</p> <p>Parametry 6V powered lastic tile</p> <p>W komplecie Frame, tile with a touchless flush installed, and a 6V power supply unit</p> <p>Opcja 3504WR - Version with flushing model ASS 3M</p>

POWER SUPPLY UNITS

		code	description																										
Power supply units		Power supply units	<p>Power supply units</p> <p>Parameters Input 230V, 50Hz</p>																										
	  <p>TR8 TR6</p>		<table border="1"> <thead> <tr> <th>Types</th> <th>Output</th> <th>Dimensions</th> <th>Max units</th> </tr> </thead> <tbody> <tr> <td>ZAS 50/12t</td> <td>12V, max. 50VA</td> <td>114 x 114 x 58 mm</td> <td>5</td> </tr> <tr> <td>TR8</td> <td>12V, max. 9,5VA</td> <td>66 x 60 x 49 mm</td> <td>1</td> </tr> <tr> <td>TR6</td> <td>12V, max. 6VA</td> <td>75 x 89 x 28 mm</td> <td>1</td> </tr> <tr> <td>ZAS 230A/6DS 31</td> <td>6V, max. 6VA</td> <td>Ø 72x72cm</td> <td>4</td> </tr> <tr> <td>ZAS 230V/6DSC</td> <td>6V, max. 6VA</td> <td>70x47x57 mm</td> <td>1</td> </tr> <tr> <td>SLZ 01Y</td> <td>24V</td> <td>140x100x60 mm</td> <td>5</td> </tr> </tbody> </table>	Types	Output	Dimensions	Max units	ZAS 50/12t	12V, max. 50VA	114 x 114 x 58 mm	5	TR8	12V, max. 9,5VA	66 x 60 x 49 mm	1	TR6	12V, max. 6VA	75 x 89 x 28 mm	1	ZAS 230A/6DS 31	6V, max. 6VA	Ø 72x72cm	4	ZAS 230V/6DSC	6V, max. 6VA	70x47x57 mm	1	SLZ 01Y	24V
Types	Output	Dimensions	Max units																										
ZAS 50/12t	12V, max. 50VA	114 x 114 x 58 mm	5																										
TR8	12V, max. 9,5VA	66 x 60 x 49 mm	1																										
TR6	12V, max. 6VA	75 x 89 x 28 mm	1																										
ZAS 230A/6DS 31	6V, max. 6VA	Ø 72x72cm	4																										
ZAS 230V/6DSC	6V, max. 6VA	70x47x57 mm	1																										
SLZ 01Y	24V	140x100x60 mm	5																										

RAILS FOR DISABLED

High quality rails, which help disabled to overcome architectural barriers in public buildings and bathrooms.

Rails made of stainless steel with rosettes masking mounting screws.

Our products have CE declarations of conformity and PZH certificate.






**PRODUKT
POLSKI**





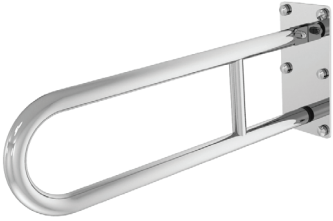


		type	description
		PSP	Series of rails made of stainless steel AISI 304, with \varnothing 30/32 mm pipe diameter and 1.5 mm thick. Polished finish – shiny
		PSM	Series of rails made of stainless steel AISI 304, with \varnothing 30/32 mm pipe diameter and 1.5 mm thick. Brushed finish - matt. Rails from this series are only made on request.
		PTP	Series of rails made of stainless steel AISI 304, covered with a nylon layer, with a \varnothing 25 mm pipe diameter Anti-skidding finish in white colour.1,5mm.

		code	description	size	
MakoLux		PSP 333 PSP 444 PSP 555 PSP 666 PSP 777 PSP 888 PSP 430	Straight grab rail for general use	300 mm 400 mm 500 mm 600 mm 700 mm 800 mm 1600 mm	
		PSM 333 PSM 444 PSM 555 PSM 666 PSM 777 PSM 888 PSM 430		300 mm 400 mm 500 mm 600 mm 700 mm 800 mm 1600 mm	
		PSP 335 PSM 335	Straight vertical grab rail Finishing/Colour: Mat or polished Use: General	350x350 mm	





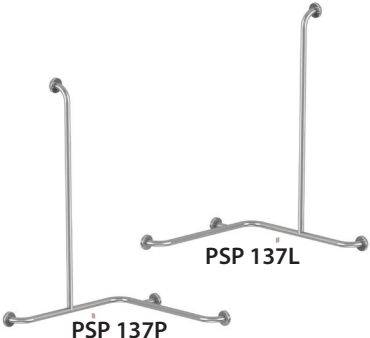
RAILS FOR THE DISABLED

		code	description	size	
MakoLux		PSP 660 PSM 660 PSP 675 PSM 675 PSP 685 PSM 685	Fold away support arm, wall mounted Use: For a toilet	length: 600/750mm	
		PSP 660s PSM 660s PSP 675s PSM 675s PSP 685s PSM 685s	Fixed support arm, wall mounted Use: For a toilet For a basin	length: 600/750/850 mm	
		PSP 660p PSM 660p PSP 675p PSM 675p PSP 685p PSM 685p	Fold away support arm, wall mounted. With a toilet paper holder. Use: For a toilet	length: 600/750/850 mm	
		PSP 760 PSM 760 PSP 760s PSM 760s	Fold away support arm (760) or fixed (760s), floor mounted. Use: For a toilet	length: 600 mm	
		PSP 760p PSM 760p	Fold away support arm, floor mounted. With a toilet paper holder Use: For a toilet	length: 600 mm	




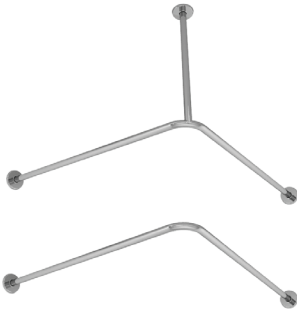


RAILS FOR DISABLED

		code	description	size	
Makolux		PSP 155L PSM 155L	Side bar grab rail with three fixings, left handed, for wall mounting Use: For a basin	550 mm	
		PSP 155P PSM 155P	Side bar grab rail with three fixings, right handed, for wall mounting Use: For a basin	550 mm	
		PSP 131L PSM 131L PSP 133L PSM 133L PSP 134L PSM 134L	Angle grab rail "L" type, left handed, for wall mounting Use: For a toilet For a shower	300x600 mm 500x700 mm 600x1100 mm	
		PSP 131P PSM 131P PSP 133P PSM 133P PSP 134P PSM 134P	Angle grab rail "L" type, right handed, for wall mounting User: For a toilet For a shower	300x600 mm 500x700 mm 600x1100 mm	
		PSP 136 PSM 136	Corner grab rail, horizontal, for wall mounting Use: For a shower	750x750 mm	

RAILS FOR THE DISABLED

		code	description	size	
MakoLux		PBPX PBMX	Toilet paper holder, fixed on a rail 32 mm Made of stainless steel AISI304 Use: For a toilet	100x95 mm	
		PBPL	Shower holder fixed on a rail 32 mm Made of ABS material, chrome covered Use: For a shower	118x43 mm	
	 PSP 177P PSP 177L	PSP 177L PSP 177P PSM 177L PSM 177P	Grab rail "H" type, left or right handed, for wall and floor mounting Use: For a toilet	750x800 mm	
	 PSP 135L PSP 135P	PSP 135L PSP 135P PSM 135L PSM 135P	Corner two way grab rail, left or right handed, for wall mounting Use: For a shower For a bath	700x610x750 mm	
	 PSP 137L PSP 137P	PSP 137L PSM 137L PSP 137P PSM 137P	Angle grab rail "L" type, left or right handed, for wall mounting Use: For a shower	800x800x1100 mm	

ACCESSORIES FOR DISABLED

		code	description	size	
Makolux		PSP 501 PSM 501	Folded shower seat, with support frames, for wall mounting Use: For a shower	420x400 mm	
		PSP 501A PSM 501A	Folded shower seat, without support frames for wall mounting. Use: For a shower	420x400 mm	
		PSP 502 PSM 502	Shower seat with a backrest, hung on a rail Use: For a shower	500x400 mm	
		PSP 900 PSM 900 PSP 901 PSM 901	Shower curtain holder, for wall and ceiling mounting Use: For a shower	900x900x500 mm 900x900 mm	
		PSP 800 PSM 800 RSP RSM	Fold away mirror in a full frame Use: For a basin	600x600 mm	
		PSP 801 PSM 801 RSP RSM	Fold away mirror in a side frame Use: For a basin	600x600 mm	

RAILS FOR THE DISABLED

High quality rails supporting people with reduced mobility in overcoming architectural barriers in toilets and bathrooms.

Rails made of steel powder coated with enamel, painted in white

Two options available :

- ø25 mm
- ø32 mm

Our products are certified with a declaration of conformity CE and PZH







**PRODUKT
POLSKI**








When ordering rails with tube ø32 mm or in a different RAL colour, 20% has to be added to catalog price

		code	description	size	
ElkoMed		UP 3 UP 4 UP 5 UP 6 UP 7 UP 8 UP 16	UP3 - UP8 Straight grab rails for general use. UP 16 Straight, vertical grab rail.	300 mm 400 mm 500 mm 600 mm 700 mm 800 mm 1600 mm	
		UR 5 UR 6 UR 7 UR 8	Fold away support arm, for wall mounting Use: For a toilet	500 mm 600 mm 700 mm 800 mm	
		UR 5s UR 6s UR 7s UR 8s	Fixed support arm, for wall mounting. Use: For a toilet For a basin	500 mm 600 mm 700 mm 800 mm	
		UR 5p UR 6p UR 7p UR 8p	Fold away support arm, for wall mounting. With a toilet paper holder. Use: For a toilet	500 mm 600 mm 700 mm 800 mm	
		UKU	Angle grab rail 135°, or wall mounting. Use: General	350x350 mm	


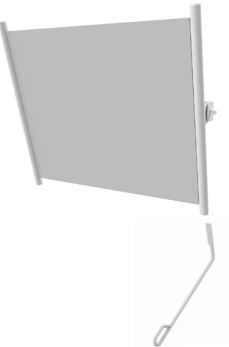
RAILS FOR DISABLED ø 25 mm

		code	description	size	
EkoMed		URP 5 URP 5s URP 6 URP 6s	Fold away (URP6) or fixed (URP6s) support arm, for floor mounting. Use: For a toilet	500 mm 600 mm	
		URP 5p URP 6p	Fold away support arm for floor mounting. With a toilet paper holder Use: For a toilet	500 mm 600 mm	
		UUL	Side bar grab rail with three fixings, left handed, for wall mounting. Use: For a basin	500mm	
		UUP	Side bar grab rail with three fixings, right handed, for wall mounting. Use: For a basin	500mm	
		UKL UKL 8/4	Angle grab rail "L" type, left handed, for wall mounting. Use: For a toilet For a shower	400x600 mm 400x800 mm	
		UKP UKP 8/4	Angle grab rail "P" type, right handed, for wall mounting. Use: For a toilet For a shower	400x600 mm 400x800 mm	

RAILS FOR DISABLED ø 25 mm

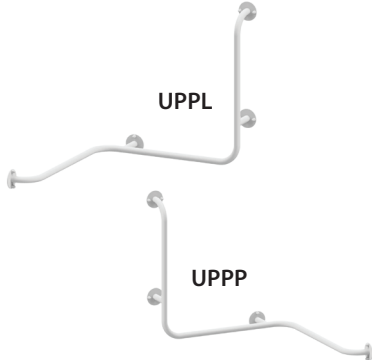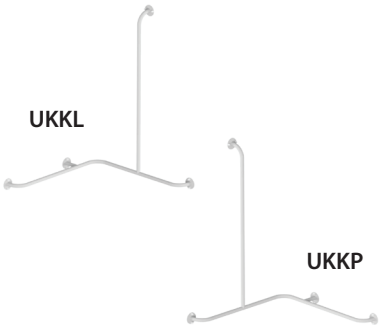		code	description	size	
EkoMed		UK 7 UK 8	Corner grab rail, horizontal, for wall mounting. Use: For a shower	700x700 mm 800x800 mm	
	 UWCL UWCP	UWCL UWCP	Grab rail "H" type, left or right handed, for wall and floor mounting. Use: For a toilet	800x800 mm	
	 UPPL UPPP	UPPL UPPP	Corner two way grab rail, left or right handed, for wall mounting. Use: For a shower	600x600x600 mm	
	 UKKL UKKP	UKKL UKKP	Angle grab rail, left or right handed for wall mounting. Use: For a shower	800x800x1100 mm	
		UP 90 UP 91	Shower curtain holder, for wall and ceiling mounting Use: For a shower	900x900x500 mm 900x900 mm	

ACCESSORIES FOR DISABLED

		code	description	size	
EkoMed		KP 5	Folded shower seat, with support frames, for wall mounting. Use: For a shower	440x400 mm	
		KP 6	Folded shower seat, without support frames, for wall mounting. Use: For a shower	400x400 mm	
		TPU	Shower seat . Use: For a shower	500 x 300 mm	
		LU RSB	Fold away mirror in a full frame. RSB - with hand Use: For a basin	600x600 mm	
		LU 2 RSB	Fold away mirror in a full frame. 4mm glass RSB- with hand Use: For a basin	600x600 mm	

RAILS FOR THE DISABLED \varnothing 25 mm


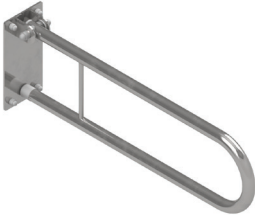
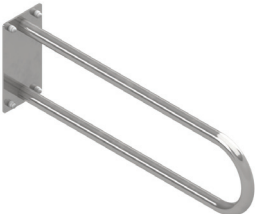



**PRODUKT
POLSKI**

High quality rails supporting people with reduced mobility in overcoming architectural barriers in toilets and bathrooms.

Rails made of stainless steel \varnothing 25 mm.

Our products are certified with a declaration of conformity









		code	description	size	
EkoLUX		PTP 333 PTP 444 PTP 666 PTP 888	Straight grab rail for general use	300 mm 400 mm 600 mm 800 mm	
		PTP 660 PTP 675	Fold away support arm, for wall mounting. Use: For a toilet For a basin	600 mm 750 mm	
		PTP 660s PTP 675s	Fixed support arm, for wall mounting. Use: For a toilet For a basin	600 mm 750 mm	
		PTP 132L PTP 132P PTP 133L PTP 133P	Angle grab rail "L" type, left (L) or right (P) handed, for wall mounting. Use: For a toilet For a shower	400 x 600 500 x 700	
		PTP 760	Fold away support arm, for floor mounting. Use: For a toilet For a basin	600 mm	
		PTP 760s	Fixed support arm, for floor mounting. Use: For a toilet For a basin	600 mm	

EMERGENCY SHOWERS







Eyewash units

	code	descriptions	
	1100/5	<p>Safety eyewash unit with one spout, table-top mounted</p> <p>Installation 3/8" connection</p> <p>Parameters Pulled out of the handle. Minimum pressure of 2 bar. Weight 1.17 kg</p>	
	1100/42	<p>Safety eyewash unit with two spouts, for wall mounting on the holder</p> <p>Installation 3/8" connection</p> <p>Parameters Detachable from the mount wall. Minimum pressure of 2 bar. Weight 1.17 kg</p>	
	1100/60	<p>Safety eyewash unit with two spouts, table-top mounted.</p> <p>Installation 3/8" connection</p> <p>Parameters Retractable Minimum pressure of 2 bar Weight 1.35 kg</p>	
	1100/65	<p>Safety eyewash unit with one spout, straight, for wall mounting on the holder</p> <p>Installation 3/8" connection</p> <p>Parameters Detachable from the mount wall. Minimum pressure of 2 bar. Weight 1.16 kg.</p>	
	1100/300	<p>Safety eyewash station with two spouts, with a bowl made of ABS material, wall mounting and water supply.</p> <p>Installation 1/2" connection, 1" water outlet</p> <p>Parameters Activated by hand push handle. Minimum pressure of 2 bar. Weight 3.50 kg.</p>	
	1100/330	<p>Free standing safety eyewash station with two spouts, with a bowl made of ABS material, pedestal mounted</p> <p>Installation 1/2" connection, 1" water outlet</p> <p>Parameters Activated by hand push handle or by pedal lever. pressure of 2 bar. Weight 3.50 kg.</p>	

EMERGENCY SHOWERS



		code	descriptions	
Emergency Showers		1100/150	<p>Wall mounted safety shower, horizontal, lever activated</p> <p>Installation 3/4" connection</p> <p>Parameters Minimum pressure of 2 bars. Weight 2,50 kg.</p>	
		1100/380	<p>Emergency set: Safety eyewash station with two spouts, with a bowl made of ABS material. Activated by hand push handle or by pedal lever. Safety shower lever activated</p> <p>Installation 1" connection from above or a t 159 cm distance from the floor., 1" outlet</p>	
Portable eyewasher		1100/250 1100/250Z	<p>Portable eye wash station with one spout</p> <p>Parameters Container made of stainless steel AISI 316 Volume: 16 litres Water pressure resulting from compressed air of 6bar value Hose length: 1,5 m Weight: about 8 kg</p> <p>Options 1100/250Z - yellow coloured version</p>	
Emergency platform		1100/470	<p>Emergency platform</p> <p>Installation 1" connection, 1" outlet</p> <p>Parameters Water flow activated automatically after stepping on the platform ramp. Safety eyewash station, with a bowl made of ABS</p>	

HAND DRYERS

		code	description	size	weight	
FastFlow		MFSA MFCA	Housing: Stainless steel AISI304, 1.5 mm thick Finish/colour: MFSA - Matt MFCA - Shiny Colour choice: Red, Black, White Use: Touchless, sensor activated. Brushless motor version: MFSA+ / MFCA+	x 300 mm y 730 mm z 222 mm	11 kg	
InFlow		MFJB	Housing: ABS material Finish/colour: White Colour choice: Red, White, Purple, Black Use: Touchless, sensor activated Brushless motor version: MFJ1+	x 300 mm y 687 mm z 222 mm	11 kg	
SkyFlow		MFZB MFZS	Housing: ABS material Finish/colour: MFZB - white MFZS - grey Power: 1650W Speed: 342 km/h Use: Touchless, sensor activated equipped in HEPA filter	x 300 mm y 624 mm z 200 mm	7,5 kg	
Storm		MCSA2 MCCA2	Housing: Stainless steel AISI304, Finish/colour: Mat or polished Power: 1800W Speed: 324 km/h Use: Touchless, sensor activated Anti-vandal construction	x 240 mm y 270 mm z 174 mm	4,2 kg	
Tornado		MKSA	Housing: Stainless steel AISI304, Finish/colour: Mat Power: 1000W Speed: 324 km/h Use: Touchless, sensor activated Anti-vandal construction Very slim	x 300 mm y 320 mm z 100 mm	3,5 kg	
SlimFlow		MBPA4S	Housing: Stainless steel AISI304, Finish/colour: Mat Power: 1250W Speed: 324 km/h Use: Touchless, sensor activated Anti-vandal construction	x 282 mm y 240 mm z 174 mm	4,5 kg	

HAND DRYERS

		code	description	size	weight	
SpeedJet		MBPA4	Housing: ABS material Finish/colour: White Power: 1250W Speed: 324 km/h Use: Touchless, sensor activated	x 282 mm y 240 mm z 174 mm	4 kg	
EcoFlow		MBBA	Housing: ABS material Finish/colour: White Power: 1800W Speed: 44 km/h Use: Touchless, sensor activated	x 240 mm y 240 mm z 200 mm	2,5 kg	
BigFlow		MINC MINS	Housing: Stainless steel AISI304 1,5 mm thick Finish/colour: Shiny or mat Power: 1500W Speed: 44 km/h Use: Touchless, sensor activated Anti-vandal construction	x 225 mm y 282 mm z 157 mm	2,2 kg	
BigFlow		MDCA MDSA	Housing: Stainless steel AISI304 1,5 mm thick Finish/colour: Shiny or mat Power: 1800W Speed: 44 km/h Use: Touchless, sensor activated Anti-vandal construction	x 255 mm y 355 mm z 148 mm	4 kg	
AirFlow		MBAS	Housing: ABS material Finish/colour: Silver Power: 2300W Speed: 90 km/h Use: Touchless, sensor activated	x 250 mm y 320 mm z 140 mm	3 kg	
AirFlow		MBAB	Housing: ABS material Finish/colour: White Power: 2300W Speed: 90 km/h Use: Touchless, sensor activated	x 250 mm y 320 mm z 140 mm	3 kg	






HOTEL DRYERS



	code	description	size	weight		
Hotel dryers	NOWOŚĆ					
		VENTO	<p>Housing: ABS material</p> <p>Finishing/Colour: White-grey</p> <p>Power: 2000 W</p> <p>Use: Sensor activated Temperature safety Height adjustment on the guide The dryer can be rotated 180° horizontally.</p>	<p>x 411 mm y 1141mm z 320 mm</p>	7 kg	
		MG88HTA MG88HTB	<p>Housing: Enameled steel, 2 mm thick</p> <p>Finishing/Colour: White (MG88HTB) Charcoal (MG88HTA)</p> <p>Power: 1000 W</p> <p>Use: Self closing, button activated, vandal proof design, reinforced hose</p>	<p>x 298 mm y 270 mm z 235 mm</p>	8 kg	
	NOWOŚĆ					
		R305	<p>Housing: ABS material</p> <p>Finishing/Colour: White</p> <p>Power: 1000 W</p> <p>Use: automatic start after removing the handset Temperature safety</p>	<p>x 190 mm y 550 mm z 130 mm</p>	1,5 kg	
	R303	<p>Housing: ABS material</p> <p>Finishing/Colour: white</p> <p>Moc: 700W</p> <p>Use: automatic start after removing the handset Temperature safety</p>	<p>x 92 mm y 265 mm z 105 mm</p>	1,2 kg		
	R302 ULTRA	<p>Housing: ABS material, white</p> <p>Parameters: Power 1500W automatic start after removing the handset Temperature safety Switches of after 8 min.</p>	<p>x 190 mm y 265 mm z 102 mm</p>	1,2 kg		

HOTEL DRYERS



		code	description	size	
Hotello		R301	<p>Housing: ABS material, silver</p> <p>Parameters: 1200W power Activated automatically by removing the handgrip from its holder Safety switch after 8 min. Thermal safety</p>	<p>x 190 mm y 265 mm z 102 mm</p>	
		R302	<p>Housing: ABS material, white</p> <p>Parameters: 1200W power Activated automatically by removing the handgrip from its holder Safety switch after 8 min. Thermal safety</p>	<p>x 190 mm y 265 mm z 102 mm</p>	
Premium		R401	<p>Housing: ABS material, silver</p> <p>Parameters: 1600W power 110V or 230V shaver socket Momentary push button Comfort Night Light On and off switch on a base 2-step air flow regulation 3- step temperature regulation Thermal safety</p>	<p>x 250 mm y 330 mm z 150 mm</p>	
		R510	<p>Housing: ABS material, white</p> <p>Parameters: 1600W power 110V or 230V shaver socket Momentary push button Comfort Night Light On and off switch on a base 2-step air flow regulation 3- step temperature regulation Thermal safety</p>	<p>x 250 mm y 185 mm z 115 mm</p>	
		R511	<p>Housing: ABS material, silver</p> <p>Parameters: 1600W power 110V or 230V shaver socket Momentary push button Comfort Night Light On and off switch on a base 2-step air flow regulation 3- step temperature regulation Thermal safety</p>	<p>x 250 mm y 185 mm z 115 mm</p>	

HOTEL DRYERS



		code	description	size	
Excel		R703	<p>Housing: ABS material, white</p> <p>Parameters: Power: 1200W 230V / 16A shaver socket Momentary push button On / off network based 2-stage airflow adjustment 3-stage temperature control Thermal protection</p>	x 120 mm y 325 mm z 155 mm	
		R501+	<p>Housing: ABS material, black/ chrome</p> <p>Parameters: Power 1600W Momentary push button On / off network based 2-stage airflow adjustment 3-stage temperature control Thermal protection</p>	x 250 mm y 185 mm z 115 mm	
		R502+	<p>Housing: ABS material, white/ chrome</p> <p>Parameters: Momentary push button On / off network based 2-stage airflow adjustment 3-stage temperature control Thermal protection</p>	x 250 mm y 185 mm z 115 mm	
Premium		R601	<p>Housing: ABS material, white</p> <p>Parameters: Power 1100W Momentary push button Thermal protection</p>	x 245 mm y 183 mm z 88 mm	
		R602	<p>Housing: ABS material, white</p> <p>Parameters: Power 1800W Momentary push button 2-stage airflow adjustment 3-stage temperature control Thermal protection</p>	x 255 mm y 185 mm z 145 mm	

NOWOŚĆ






BATHROOM ACCESSORIES



		code	description	size	capacity	
ABS accessories		B7001 B7001P	Housing: ABS material Finish/colour: White Intended use: Soap directly poured B7001 - For liquid soap B7001P - For foamed soap	x 115 mm y 245 mm z 110 mm	1l	
		B7002 B7002P	Housing: ABS material Finish/colour: White Intended use: B7002 - For liquid soap B7002P - For foamed soap	x 90 mm y 194 mm z 100 mm	0,4l	
		B7101	Housing: ABS material Finish/colour: White Intended use: Paper towels dispenser ZZ type paper towels	x 260 mm y 300 mm z 130 mm	do 600 szt ręczników typu ZZ	
		B7401	Housing: ABS material Finish/colour: White Intended use: Jumbo toilet paper	x 278 mm y 288 mm z 138 mm	Rolka: 250 mm	
		B7701	Housing: ABS material Finish/colour: White Characteristic: WC brush for wall-mounting Intended use: WC	x 128 mm y 178 mm z 135 mm		

BATHROOM ACCESSORIES



		code	description	size	capacity	
Dozowniki do mydła		C7001S C7001C	Housing: Stainless steel AISI304 Finishing/Colour: mat or polished Use: Key-locked Inspection slot to indicate refill level	x 100 mm y 320 mm z 112 mm	1 l	
		C7002C C7002S	Housing: Stainless steel AISI304 Finishing/Colour: mat or polished Use: Key-locked Inspection slot to indicate refill level	x 121 mm y 206 mm z 160 mm	1,2 l	
		C7004S C7004C	Housing: Stainless steel AISI304 Finishing/Colour: mat (C7004S) polished (C7004C) Use: Key-locked Inspection slot to indicate refill level	x 95 mm y 150 mm z 110 mm	0,5 l	
		C7003C C7003S	Housing: Stainless steel AISI304 Finishing/Colour: mat or polished Use: Key-locked Inspection slot to indicate refill level	x 210 mm y 122 mm z 121 mm	1,2 l	
		C7000	Housing: Stainless steel AISI304 Finishing/Colour: mat or polished Use: Key-locked Inspection slot to indicate refill level	x 127 mm y 203 mm z 104 mm	1,2 l	







BATHROOM ACCESSORIES



		code	description	size	capacity	
Soap dispensers		C7011	Housing: stainless steel AISI304 Finish/colour: Mat Characteristic: Paper towels dispenser and automatic liquid soap dispenser Behind-mirror montage	x 495 mm y 322 mm z 110 mm	0,5 l	
		C7008WS	Housing: stainless steel AISI304 Finish/colour: Mat Characteristic: Key lock Inspection slot to indicate refill level Concealed montage Soap container made of ABS material	x 140 mm y 240 mm z 98 mm	1,2 l	
disinfectant fluid dispenser		J5SS J5SC J5B	Housing: stainless steel mat AISI304 (J5SS) polished stainless steel AISI304 (J5SC) white ABS material (J5B) Characteristic: Key lock Inspection slot to indicate refill level Elbow lever	x 120 mm y 305 mm z 170 mm	1,2 l	
		J6SS J6SC	Housing: stainless steel AISI304 Finish/colour: Mat or polished Characteristic: Inspection slot to indicate refill level Elbow lever All its elements can be treated with disinfectant.	x 265 mm y 110 mm z 85 mm	1,0 l	
		J3E1	Housing: stainless steel AISI304 Soap container - ABS material Finish/colour: Polished Characteristic: Filled through the upper opening after removing the spout	Spout: 100 mm Neck: 100 mm Container: 117 mm Cover: ø 50 mm	1,0 l	

BATHROOM ACCESSORIES

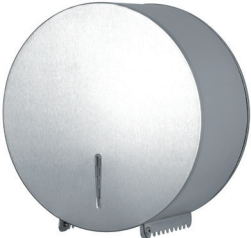

		code	description	size	capacity	
Paper towels dispenser		C7102S C7102C	Housing: Stainless steel Finishing/colour: Mat or polished Use: Key-locked Inspection slot to indicate refill level	x 280 mm y 348 mm z 102 mm	400/600 ręczników typu ZZ	
		C7103S	Housing: Stainless steel Finishing/colour: Mat Use: Key-locked Inspection slot to indicate refill level	x 280 mm y 248 mm z 102 mm	300/400 ręczników typu ZZ	
Toilet paper dispenser		C7402S C7402C	Housing: Stainless steel Finishing/colour: Mat or polished Use: Key-locked Inspection slot to indicate refill level	x 260 mm y 265 mm z 130 mm	1 rolka max szer. 250 mm	
		C7403S C7403C	Housing: Stainless steel Finishing/colour: Mat or polished Use: Key-locked Inspection slot to indicate refill level C7430 - made of stainless steel AISI 430	x 310 mm y 320 mm z 130 mm	1 rolka max szer. 300 mm	
		C7405S C7405C	Housing: Stainless steel AISI304 Finishing/colour: Mat or polished Use: Key-locked Inspection slot to indicate refill level	x 270 mm y 133 mm z 117 mm	200/300 listków	
		C7407S C7407C	Housing: Stainless steel AISI304 Finishing/colour: Mat or polished Use: Key-locked Inspection slot to indicate refill level	x 150 mm y 300 mm z 140 mm	2 rolki papieru standard	

BATHROOM ACCESSORIES



		code	description	size	capacity	
Stainless steel accessories	NOWOŚĆ					
		H1C H1S H2C H2S	Housing: stainless steel AISI304 Finish/colour: Mat or polished Characteristic: H1 - single hanger H2 - double hanger	ø 50 mm z 55 mm ø 50 mm z 55 mm		
		Hi19S Hi19C	Housing: stainless steel AISI304 Finish/colour: Mat or polished Characteristic: Standar toilet paper dispenser	x 126 mm y 80 mm z 110 mm	1 rolka papieru standard	
Hygiene bags dispenser		C7601S C7601C	Housing: stainless steel AISI304 Finish/colour: Mat or polished Parameters: Hygiene bags dispenser	ø 250 mm y 610 mm	Pojemność ok 100 szt.	
		PHF PHFC	Housing: stainless steel AISI304 Finish/colour: Mat, polished or white Parameters: Hygiene bags dispenser	x 95 mm y 136 mm z 23 mm	Pojemność ok. 30 sztuk	
Pictograms		PGH PGM PGA PGCP	Door pictograms Material: Laminate imitating stainless steel Mounting with double-side tape	x 120 mm y 120 mm		

WASTE BINS



		code	description	size	capacity	
bins		C7525S C7525C C7525TS C7525TC	Housing: Stainless steel AISI304 Finishing/Colour: Mat or polished Parameters: Wall-mounted Hooks for securing the bag	x 358 mm y 435 mm z 155 mm	25 L	
	NEW IN 	C7528TS	Housing: Stainless steel AISI304 Finishing/Colour: Mat Parameters: Wall-mounted Hinged flap handles for fixing the bag inside the container	x 365 mm y 487 mm z 160 mm	28 L	
		C7505S C7505C	Housing: Stainless steel AISI304 Finishing/Colour: Mat or polished Parameters: Top cover The bottom flap is closed with a key Intended for women's toilets	x 230 mm y 290 mm z 102 mm	5 L	
		C7918C C7918S C7945C C7945S C7970C C7970S	Housing: Stainless steel AISI304 Finishing/Colour: Mat or polished Parameters: 360° swivel cover Non-slip rubber base	ø 240 mm y 400 mm ø 300 mm y 660 mm ø 380 mm y 690 mm	18 l 45 l 70 l	
		C8030S	Housing: Stainless steel AISI304 Finishing/Colour: Mat Parameters: self-extinguishing Non-slip rubber base Self-extinguishing cover RWTUV certificate	ø 318 mm y 685 mm	30 L	






WASTE BINS



		code	description	size	capacity	
Kosze		C7508C C7508S	Housing: stainless steel AISI304 Finish/colour: Mat or polished	ø 200 mm y 360 mm	8 l	
		C7520C C7520S	Parameters: Waste bin Swing lid	ø 240 mm y 520 mm	20 l	
		C7803C	Housing: stainless steel AISI304 Finish/colour: polished Parameters: Round waste bin Opens by stepping on a pedal Plastic bucket	ø 165 mm y 250 mm	3 L	
		C7805C		ø 210 mm y 325 mm	5 L	
		C7807C		ø 230 mm y 335 mm	7 L	
		C7812C		ø 245 mm y 386 mm	12 L	
C7820C		ø 250 mm y 395 mm		20 L		
C7830C		ø 305 mm y 530 mm		30 L		
	C7803S	Housing: stainless steel AISI304 Finish/colour: Mat Parameters: Round waste bin Opens by stepping on a pedal Plastic bucket	ø 165 mm y 250 mm	3 L		
	C7805S		ø 210 mm y 325 mm	5 L		
	C7812S		ø 245 mm y 386 mm	12 L		
	C7820S		ø 250 mm y 395 mm	20 L		
	C7830S		ø 305 mm y 530 mm	30 L		
			C7803B	Housing: powder-polished steel White Parameters: Opens by stepping on a pedal Plastic bucket	ø 165 mm y 250 mm	3 L
C7805B		ø 210 mm y 325 mm	5 L			
C7812B		ø 245 mm y 386 mm	12 L			
C7820B		ø 250 mm y 395 mm	20 L			
C7830B		ø 305 mm y 530 mm	30 L			
		C7845C	Housing: stainless steel AISI304 Finish/colour: Polished Parameters: Waste container		ø 300 mm y 690 mm	45 L

OTHER ACCESSORIES



		code	description	size	
Toilet brushes		C7701S C7701C	<p>Housing: stainless steel AISI 430</p> <p>Finishing/Colour: Mat or polished</p> <p>Parameters: Round toilet brush Floor or wall mounted Plastic cup</p>	<p>ø 100 mm</p> <p>y 370 mm</p>	
		C7702S C7702C	<p>Housing: stainless steel AISI 430</p> <p>Finishing/Colour: Mat or polished</p> <p>Parameters: Square toilet brush Floor or wall mounted Plastic cup</p>	<p>x 110 mm</p> <p>y 370 mm</p> <p>z 110 mm</p>	
		C7703S C7703C	<p>Housing: stainless steel AISI 430</p> <p>Finishing/Colour: Mat or polished</p> <p>Parameters: toilet brush Floor or wall mounted Plastic cup</p>	<p>x 420 mm</p> <p>y 110 mm</p> <p>z 115 mm</p>	
		C7704S C7704C	<p>Housing: stainless steel AISI 430</p> <p>Finishing/Colour: Mat or polished</p> <p>Parameters: toilet brush Floor or wall mounted</p>	<p>x 400 mm</p> <p>ø 90 mm</p>	
		C7705C	<p>Housing: stainless steel</p> <p>Finishing/Colour: Chrome</p> <p>Parameters: Toilet brush+ paper handle</p>	<p>x 190 mm</p> <p>y 730 mm</p> <p>z 190 mm</p>	

OTHER ACCESSORIES



		code	description	size		
Shower tra		PD80 PD90	Low level access shower tray Material: polyester resin Parameters: Flat, low level access Intended for those with reduced mobility Allows for wheelchair access	x 800 mm y 800 mm z 40 mm x 900 mm y 900 mm z 40 mm		
	changing tables		BCTH	Baby changing table, horizontal Material: White polyurethane Parameters: Wall-mounted Fold down Adjustable safety trap	Otwarty: x 871 mm y 390 mm z 446 mm Zamknięty: x 871 mm y 390 mm z 90 mm	
			BCTV	Baby changing table, vertical Material: White polyurethane Finish/colour: White Parameters: Wall-mounted Fold down Adjustable safety trap	Otwarty: x 489 mm y 789 mm z 814 mm Zamknięty: x 489 mm y 789 mm z 100 mm	
			BCTXIH BCTXSH	Baby changing table, horizontal Material: Stainless steel AISI 304 Finish/colour: Matt Parameters: Exposed and concealed version, Wall mounted Fold down	Otwarty: x 900 mm y 600 mm z 870 mm Zamknięty: x 900 mm y 600 mm z 100 mm	
			BCTXIP BCTXSP	Adults changing table Material: Stainless steel AISI 304 Finish/colour: Matt Parameters: BCTXIP - Concealed mounted BCTXSP - Surface mounted Wall folded regulated belt Max. Weight 182 kg	Otwarty: x 600 mm y 1650 mm z 550 mm Zamknięty: x 600 mm y 1650 mm z 101 mm	

STAINLESS STEEL APPLIANCES

	kod	opis	wymiary	cena netto
	P1	Mirror form stainless steel	x 600 mm y 400 mm z 1,5 mm	385 zł
	P2	Material: Stainless steel AISI 304	x 900 mm y 600 mm z 1,5 mm	447 zł
	P3	Finishing/Colour: Polished Anti-vandal construction	x 440 mm y 285 mm z 1,5 mm	298 zł
NEW IN 	SB13 SB13P	Basin from stainless steel Material: Stainless steel AISI 304 Finishing/Colour: Mat Anti-vandal construction SB13P - with water dispenser	x 365 mm y 210 mm z 362 mm	540 zł 724 zł
	SB10	Basin from stainless steel Material: Stainless steel AISI 304 Finishing/Colour: Mat Anti-vandal construction	x 426 mm y 185 mm z 530 mm	867 zł
NEW IN 	SB14	Basin from stainless steel Material: Stainless steel AISI 304 Finishing/Colour: Mat Anti-vandal construction Options Siphon for SB14 washbasin	x 500 mm y 198 mm z 408 mm	739 zł 70 zł
	PDS90	Paddling pool for the disabled Material: Stainless steel AISI 304 Finishing/Colour: Mat Anti-vandal construction Siphon for SHC3	x 900 mm y 900 mm z 125 mm	1710 zł 152 zł
	SUSS	Inter-pillar divider Housing: Stainless steel AISI 304 Finishing/Colour: Mat Parameters: Anti-vandal construction	x 40 mm y 700 mm z 350 mm	598 zł

STAINLESS STEEL APPLIANCES



	code	description	size	
	SU20	Stainless steel urinal Material: Stainless steel AISI 304 Finish/colour: Shiny or Matt Vandal resistant options Siphon for SHC4 urinal	x 360 mm y 605 mm z 375 mm	
	ST21	Toilet for disabled Material: Stainless steel AISI 304 Finish/colour: Mat Vandal resistant	x 700 mm y 340 mm z 370 mm	
	ST23	Stainless steel toilet Material: Stainless steel AISI 304 Finish/colour: Mat Vandal resistant	x 355 mm y 380 mm z 550 mm	
NEW IN 	ST11	Stainless steel close coupled toilet Material: Stainless steel AISI 304 Finish/colour: Shiny or Matt	x 620 mm y 370 mm z 670 mm	
	DST23	Toilet seat Material: Duroplast Finish/colour: Black	x 455 mm y 370 mm	

Stainless steel accessories

HOTEL ACCESSORIES- VIRGINIA SERIES



	code	description	size	
	V72077	Bathroom hook, double Finish/colour: Mat Cynkal	x 75 mm y 70 mm z 40 mm	
	V72142	Bathroom rack, with 4 hooks Finish/colour: Mat Cynkal	x 210 mm y 35 mm z 50 mm	
	V72079	Toilet paper roll holder, with a hood Finish/colour: Mat Cynkal	x 140 mm y 130 mm z 55 mm	
	V72078	Toilet paper roll holder, Finish/colour: Mat Cynkal	x 180 mm y 100 mm z 60 mm	
	V72092	Toilet paper roll holder, Finish/colour: Mat Cynkal	x 60 mm y 175 mm z 70 mm	
	V72088	Toilet brush Finish/Colour: Mat Cynkal, mat glass	x 115 mm y 375 mm z 155 mm	
	V72082	basket soap dish Finish/colour: Mat Cynkal, szkło matowe	x 135 mm y 60 mm z 125 mm	
	V72083	Wire basket soap dish Finish/colour: Mat Cynkal	x 130 mm y 70 mm z 120 mm	
	V72089	Soap dispenser Finish/Colour: Mat Cynkal, mat glass	x 65 mm y 155 mm z 115 mm	
	V72080	Holder with a cup Finish/Colour: Mat Cynkal, smat glass	x 66 mm y 90 mm z 110 mm	
	V72081	Double holder with a cup Finish/Colour: Mat Cynkal, mat glass	x 155 mm y 90 mm z 110 mm	
	V72076	Bathroom shelf for under the mirror Finish/Colour: Mat Cynkal, mat glass	x 605 mm y 60 mm z 155 mm	
	V72085 V72086	Towel rail Finish/Colour: Mat Cynkal	x 525/620 y 60 mm z 95/105	
	V72087	Double Towel rail Finish/Colour: Mat Cynkal	x 620 mm y 60 mm z 160 mm	
	V72126	Movable towel holder Finish/Colour: Mat Cynkal	x 60 mm y 60 mm z 480 mm	
	V72084	Oval towel holder Finish/Colour: Mat Cynkal	x 225 mm y 60 mm z 135 mm	




HOTEL ACCESSORIES- NORD SERIES

	code	description	size		
	ND 572C ND 572S	Bathroom hook, double Finish/colour: Polish or mat Nickel	x y z	85 mm 50 mm 50 mm	
	ND 573C ND 573S	Bathroom rack, with 4 hooks Finish/colour: Polish or mat Nickel	x y z	200 mm 50 mm 30 mm	
	ND 582C ND 582S	Toilet paper roll holder, with a hood Finish/colour: Polish or mat Nickel	x y z	125 mm 40 mm 145 mm	
	ND 581C ND 581S	Toilet paper roll holder, Finish/colour: Polish or mat Nickel	x y z	125 mm 95 mm 30 mm	
	ND 583C ND 583S	Double toilet paper roll holder Finish/colour: Polish or mat Nickel	x y z	240 mm 50 mm 75 mm	
	ND 584C ND 584S	Toilet brush Finish/colour: Polish or mat Nickel	x y z	115 mm 380 mm 155 mm	
	ND 577C ND 577S	Wire basket soap dish Finish/colour: Polish or mat Nickel	x y z	137 mm 80 mm 155 mm	
	ND 585C ND 585S	Soap dispenser Finish/colour: Polish or mat Nickel	x y z	70 mm 170 mm 110 mm	
	ND 574C ND 574S	Holder with a cup Finish/colour: Polish or mat Nickel	x y z	65 mm 95 mm 105 mm	
	ND 575C ND 575S	Double holder with a cup Finish/colour: Polish or mat Nickel	x y z	155 mm 95 mm 85 mm	
	ND 570C ND 570S	Bathroom shelf for under the mirror Finish/colour: Polish or mat Nickel	x y z	500 mm 50 mm 125 mm	
	ND 578C ND 578S ND 579C ND 579S	Towel rail Finish/colour: Matt Material: Nickel	x y z	480/610 mm 50 mm 75 mm	
	ND 571C NS 571S	Movable towel holder Finish/colour: Mat or polished Material: Nikiel	x y z	60 mm 65 mm 510 mm	
	ND 580C ND 580S	Towel holder Finish/colour: Mat or polished Material: Nikiel	x y z	188 mm 170 mm 50 mm	
	ND 586C ND 586S	Bathroom grab rail Finish/colour: Shiny or matt finished stainless steel	x y z	260 mm 50 mm 70 mm	

NORD

HOTEL ACCESSORIES- FOR YOU SERIES



	code	description	size		
	FU 1173	Bathroom hook, double Finish/Colour: Chrome steel	x y z	70 mm 50 mm 45 mm	
	FU 2943	Bathroom rack, with 4 hooks Finish/Colour: Chrome steel	x y z	100 mm 65 mm 60 mm	
	FU 2924	Hair dryer holder Finish/Colour: Chrome steel	x y z	110 mm 80 mm 130 mm	
	FU 1179	Toilet paper roll holder, with a hood Finish/Colour: Chrome steel	x y z	160 mm 125 mm 65 mm	
	FU 3038	Toilet paper roll holder, Finish/Colour: Chrome steel	x y z	155 mm 100 mm 60 mm	
	FU 1178	Towel holder Finish/Colour: Chrome steel	x y z	160 mm 165 mm 65 mm	
	FU 1182	Toilet brush Finish/Colour: Chrome steel/mat glass	x y z	165 mm 375 mm 125 mm	
	FU 1176	basket soap dish Finish/Colour: Chrome steel/mat glass	x y z	70 mm 170 mm 110 mm	
	FU 1177	Soap dispenser Finish/Colour: Chrome steel/mat glass	x y z	125 mm 175 mm 90 mm	
	FU 1174	Holder with a cup Finish/Colour: Chrome steel/mat glass	x y z	125 mm 95 mm 85 mm	
	FU 1175	Double Holder with a cup Finish/Colour: Chrome steel/mat glass	x y z	190 mm 95 mm 85 mm	
	FU 1183	Bathroom shelf for under the mirror Finish/Colour: Chrome steel/mat glass	x y z	525 mm 45 mm 155 mm	
	FU 1180	Towel rail 600 mm Finish/Colour: Chrome steel	x y z	610 mm 45 mm 65 mm	
	FU 1181	Double Towel rail . 600 mm Finish/Colour: Chrome steel	x y z	610 mm 45 mm 115 mm	
	FU 4751	Double Movable towel holder Finish/Colour: Chrome steel	x y z	50 mm 62 mm 490 mm	

OUR PRODUCTS HAVE FOLLOWING ATTESTATIONS



NARODOWY INSTYTUT ZDROWIA PUBLICZNEGO - PAŃSTWOWY ZAKŁAD HIGIENY
NATIONAL INSTITUTE OF PUBLIC HEALTH - NATIONAL INSTITUTE OF HYGIENE
ZAKŁAD HIGIENY KOMUNALNEJ DEPARTMENT OF ENVIRONMENTAL HYGIENE

24 Chłodnia 60-701 Warsaw • Phone: (22) 842104, (22) 842104 • Fax: (22) 842104 • e-mail: wdz-ohk@pzh.gov.pl

ATEST HIGIENICZNY HK/BI/1795/01/2009
HYGIENIC CERTIFICATE 0100000

Wzrost / product: **Poręcza, uchwyty szklane i łuski dla osób niepełnosprawnych**

Zawierający / containing: **stal nierdzewna**

Przeznaczone do / destined: **wyposażenia pomocniczego higieniczno-sanitarnych publicznych i prywatnych**

Wymienione w tym protokół odpowiada wymaganiom higienicznym przy spełnieniu następujących warunków / is acceptable according to hygienic criteria with the following conditions:
Atest nie dotyczy parametrów technicznych wyrobów.

Wydawca / producer: **MAKOINSTAL S.C. Grzegorz Ręba, Adrian Terebicki**
 ul. Chłobowicza 1001
 ul. Chłobowicza 1001

Atest może być anulowany lub unieważniony po przedłożeniu dowodów na ewentualne zmiany parametrów technicznych wyrobów. Attest may be cancelled or annulled after appropriate notification.

Data wydania atestu higienicznego: 18 lutego 2010
 The date of issue of the certificate: 18th February 2010

Podpisano: **Grzegorz Ręba** (Zastępca Dyrektora Zakładu Higieny Komunalnej)

NARODOWY INSTYTUT ZDROWIA PUBLICZNEGO - PAŃSTWOWY ZAKŁAD HIGIENY
NATIONAL INSTITUTE OF PUBLIC HEALTH - NATIONAL INSTITUTE OF HYGIENE
ZAKŁAD HIGIENY KOMUNALNEJ DEPARTMENT OF ENVIRONMENTAL HYGIENE

24 Chłodnia 60-701 Warsaw • Phone: (22) 842104, (22) 842104 • Fax: (22) 842104 • e-mail: wdz-ohk@pzh.gov.pl

ATEST HIGIENICZNY HK/W/0475/01/2009
HYGIENIC CERTIFICATE 0100000

Wzrost / product: **Baterie sanitarnegożelazki i wannowe szklane**

Zawierający / containing: **metaliki CW617A, stopy żelaza, EPDM**

Przeznaczone do / destined: **montażu w pomieszczeniach sanitarnych publicznych i prywatnych i przeznaczonych dla osób niepełnosprawnych**

Wymienione w tym protokół odpowiada wymaganiom higienicznym przy spełnieniu następujących warunków / is acceptable according to hygienic criteria with the following conditions:
**Przeznaczony do / destined: montażu w użytkownikom basenów naziemnych przy spełnieniu następujących warunków / is acceptable according to hygienic criteria with the following conditions:
Atest nie dotyczy parametrów technicznych wyrobów.**

Wydawca / producer: **Substancja MFA Industrialna SRL**
 28071 Rogozan
 ul. Ștefan cel Mare

Niniejszy dokument wydany na wniosek / this certificate issued for: **MAKOINSTAL S.C.**
 ul. Chłobowicza 1001

Atest może być anulowany lub unieważniony po przedłożeniu dowodów na ewentualne zmiany parametrów technicznych wyrobów. Attest may be cancelled or annulled after appropriate notification.

Data wydania atestu higienicznego: 02 maja 2009
 The date of issue of the certificate: 20th May 2009

Podpisano: **Grzegorz Ręba** (Zastępca Dyrektora Zakładu Higieny Komunalnej)

NARODOWY INSTYTUT ZDROWIA PUBLICZNEGO - PAŃSTWOWY ZAKŁAD HIGIENY
NATIONAL INSTITUTE OF PUBLIC HEALTH - NATIONAL INSTITUTE OF HYGIENE
ZAKŁAD HIGIENY KOMUNALNEJ DEPARTMENT OF ENVIRONMENTAL HYGIENE

24 Chłodnia 60-701 Warsaw • Phone: (22) 842104, (22) 842104 • Fax: (22) 842104 • e-mail: wdz-ohk@pzh.gov.pl

ATEST HIGIENICZNY HK/BI/1795/02/2009
HYGIENIC CERTIFICATE 0100000

Wzrost / product: **Poręcza, uchwyty szklane i łuski dla osób niepełnosprawnych**

Zawierający / containing: **stal nierdzewna**

Przeznaczone do / destined: **wyposażenia pomocniczego higieniczno-sanitarnych publicznych i prywatnych**

Wymienione w tym protokół odpowiada wymaganiom higienicznym przy spełnieniu następujących warunków / is acceptable according to hygienic criteria with the following conditions:
Atest nie dotyczy parametrów technicznych wyrobów.

Wydawca / producer: **MAKOINSTAL S.C. Grzegorz Ręba, Adrian Terebicki**
 ul. Chłobowicza 1001
 ul. Chłobowicza 1001

Niniejszy dokument wydany na wniosek / this certificate issued for: **MAKOINSTAL S.C.**
 ul. Chłobowicza 1001

Atest może być anulowany lub unieważniony po przedłożeniu dowodów na ewentualne zmiany parametrów technicznych wyrobów. Attest may be cancelled or annulled after appropriate notification.

Data wydania atestu higienicznego: 18 lutego 2010
 The date of issue of the certificate: 18th February 2010

Podpisano: **Grzegorz Ręba** (Zastępca Dyrektora Zakładu Higieny Komunalnej)

CE **MAKOINSTAL**

DEKLARACJA ZGODNOŚCI CONFIRMITY DECLARATION

My / We: **MAKOINSTAL S.C. Grzegorz Ręba, Adrian Terebicki**
 ul. Chłobowicza 1001, 04-041 Warszawa

Deklarujemy, że wyrob / Declares that the product: **BATERIE SANITARNE, UCHEWYTY SZKLANE, ŁUSKI I AKCESORIAŁY**
TEMPERATURE TAPS, THERMOSTATIC TAPS, MIXERS TAPS AND ACCESSORIES

Typ / Model: **PS EN 816-2000**
 PS EN 816-2000
 PS EN 816-2000
 PS EN 816-2000

Został zaprojektowany i wyprodukowany w zgodności z poniższymi standardami / has been designed and manufactured in accordance with the following standards:

Wydawca / Producer: **Grzegorz Ręba**

Warszawa 14.09.2009

CE **MAKOINSTAL**

DEKLARACJA ZGODNOŚCI CONFIRMITY DECLARATION

My / We: **MAKOINSTAL S.C. Grzegorz Ręba, Adrian Terebicki**
 ul. Chłobowicza 1001, 04-041 Warszawa

Deklarujemy, że wyrob / Declares that the product: **UCHEWYTY SZKLANE, UCHEWYTY SZKLANE DLA OSÓB NIEPEŁNOSPRAWNYCH**
SUPPORT BARS AND REHABILITATION AIDS MADE OF STEEL FOR DISABLED PEOPLE

Typ / Model: **PS EN 1218-2002**
 PS EN 1218-2002

Został zaprojektowany i wyprodukowany w zgodności z poniższymi standardami / has been designed and manufactured in accordance with the following standards:

Wydawca / Producer: **Grzegorz Ręba**

Warszawa 14.09.2009

CE **MAKOINSTAL**

DEKLARACJA ZGODNOŚCI CONFIRMITY DECLARATION

My / We: **MAKOINSTAL S.C. Grzegorz Ręba, Adrian Terebicki**
 ul. Chłobowicza 1001, 04-041 Warszawa

Deklarujemy, że wyrob / Declares that the product: **UCHEWYTY SZKLANE, UCHEWYTY SZKLANE DLA OSÓB NIEPEŁNOSPRAWNYCH**
SUPPORT BARS AND REHABILITATION AIDS MADE OF STAINLESS STEEL FOR DISABLED PEOPLE

Typ / Model: **PS EN 1218-2002**
 PS EN 1218-2002
 PS EN 1218-2002
 PS EN 1218-2002

Został zaprojektowany i wyprodukowany w zgodności z poniższymi standardami / has been designed and manufactured in accordance with the following standards:

Wydawca / Producer: **Grzegorz Ręba**

Warszawa 14.09.2009

CE **MAKOINSTAL**

DEKLARACJA ZGODNOŚCI CONFIRMITY DECLARATION

My / We: **MAKOINSTAL S.C. Grzegorz Ręba, Adrian Terebicki**
 ul. Chłobowicza 1001, 04-041 Warszawa

Deklarujemy, że wyrob / Declares that the product: **BRZOZOWY DLA OSÓB NIEPEŁNOSPRAWNYCH**
RADING POLES FOR DISABLED PEOPLE

Typ / Model: **PS EN 253-1996**
 PS EN 253-1996

Został zaprojektowany i wyprodukowany w zgodności z poniższymi standardami / has been designed and manufactured in accordance with the following standards:

Wydawca / Producer: **Grzegorz Ręba**

Warszawa 14.09.2009

CE **MAKOINSTAL**

OŚWIADCZENIE

My / We: **MAKOINSTAL S.C. Grzegorz Ręba, Adrian Terebicki**
 ul. Chłobowicza 1001, 04-041 Warszawa

Oświadczamy, że wyrob / Declares that the product: **OSŁONY PRZECIWDROBOWE**
SCREENS AGAINST BURGLARS

Typ / Model: **PS EN 1218-2002**
 PS EN 1218-2002

Został zaprojektowany i wyprodukowany w zgodności z poniższymi standardami / has been designed and manufactured in accordance with the following standards:

Wydawca / Producer: **Grzegorz Ręba**

Warszawa 14.09.2009

CE **MAKOINSTAL**

DEKLARACJA ZGODNOŚCI CONFIRMITY DECLARATION

My / We: **MAKOINSTAL S.C. Grzegorz Ręba, Adrian Terebicki**
 ul. Chłobowicza 1001, 04-041 Warszawa

Deklarujemy, że wyrob / Declares that the product: **SIECIANKI DO KĄPI**
BATH SCREENS

Typ / Model: **PS EN 1218-2002**
 PS EN 1218-2002

Został zaprojektowany i wyprodukowany w zgodności z poniższymi standardami / has been designed and manufactured in accordance with the following standards:

Wydawca / Producer: **Grzegorz Ręba**

Warszawa 14.09.2009



Makoinstal S.C.
ul. Ostrobramska 67
04-175 Warszawa
Tel. (22) 499 59 50
Fax. (22) 499 59 51
www.makoinstal.pl