




## Time battery 9070

- The body is made of chrome-plated brass
- Three variants: 9070 universal, 9070 / M with a concealed mixer, and 9070AB with an anti-block system
- Water flow time adjustment (available for 9070 and 9070 / M variants)
- Water pressure reduction in the form of a cup and water flow reducer
- High resistance to vandalism (the 9070AB variant has additional protection in the form of an anti-block system)
- Classic pattern
- Exceptional durability and reliability
- The product is entirely made in the European Union
- Simple operation
- Easy to assemble
- Certificate of the Polish Institute of Hygiene
- CE declaration of conformity
- National Declaration of Performance

Option	For mixed water
Connector	G1/2
Mixer	2xG1 / 2 under-basin - only with 9070 / M
Design	Chrome-plated brass
Water time flow	Adjustable from 10 seconds $\pm$ 3 second
Start	By means of the button
Water pressure reductor	up to 6l / min.
Water temperature	5-65°C
Water pressure	Min 0,5 bar - Max 6 bar (Recommended 2-4 bar)
Contains	Battery, mounting kit for the washbasin

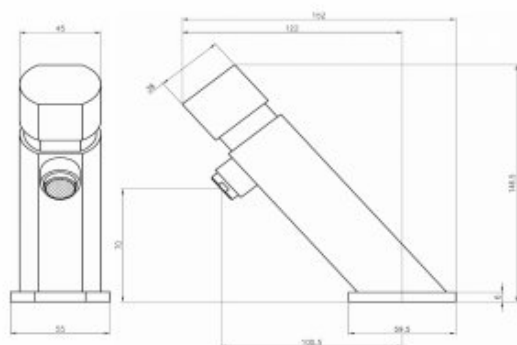

The self-closing battery from the 9070 series is a universal equipment in public spaces, such as swimming pools, gyms, fitness clubs, etc. The body is made of chrome-plated brass. The 9070 battery has one G1 / 2 connection and an attached flexible connection hose. A single outflow of water takes about 10 seconds  $\pm$  3 seconds (at a water pressure of 3 bar). The amount of water used is 6 l / m. The minimum connection pressure is 0.5 bar, the maximum is 6 bar. It is worth adding that the recommended connection pressure should be 2-4 bar.

The 9070 basin tap has several elements that regulate the time and amount of water flow. The elements are:

- a cup regulating the flow of water;
- a water flow reducer, attached to the faucet;
- water flow regulating hole, water flow time adjustment option is not available when anti-block system is used.

The offered tap is available in three variants:

- 9070 universal variant, equipped with one 1/2 connection and a cup, a water flow reducer and an adjustment hole;
- 9070 / M variant equipped with 2 x G1 / 2 concealed mixer, cup, flow reducer and regulation hole;
- 9070AB variant with an integrated anti-block system, which includes a cup and a flow reducer. The option to adjust the water flow time is not available.

In addition, each 9070 is certified by the Polish Institute of Hygiene, CE Declaration of Conformity and the National Declaration of Performance